

Drg. Nr: 173073

Doc. Rev: 0

June 2018



A60 STEEL BULKHEAD

Lightweight Version

MATERIAL: FyreWrap LT Blanket

INSULATION: 2 layers of FyreWrap LT Blanket 40mm x 48 kg/m³.

INSTALLATION: The blanket is held by ø3mm x 100mm steel welded pins and speed clips.

The first layer is installed vertically between the stiffeners, the second layer is installed horizontally over the stiffeners and first layer.

WEIGHT: 3.84kg/m²


CERTIFICATION: Lloyds Register - MED 1850117/M1
- SAS F180155/M1

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.


Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP

Tel: +44 (0)1744 887600
www.unifrax.com



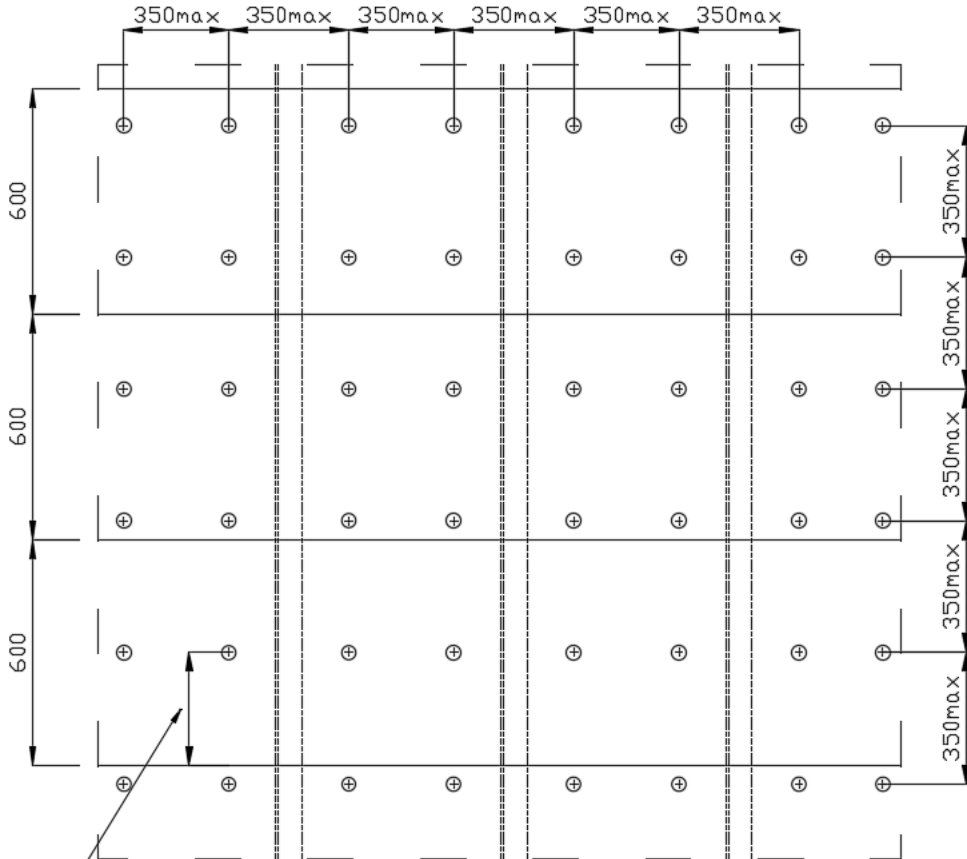

Maximum 350mm from insulation joints

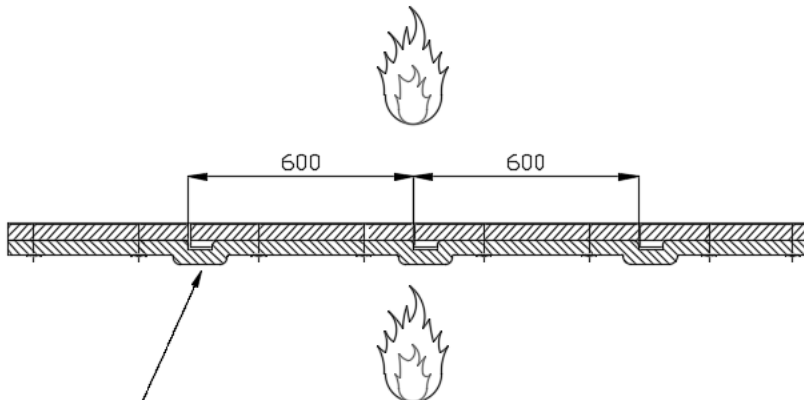

Blanket FyreWrap thk. 80mm (2x40) $d=48\text{kg/m}^3$
610 mm wide compressed to 600 mm

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

