Drg. Nr: 173072

Doc. Rev: 0

June 2018



A60 STEEL BULKHEAD RESTRICTED APPLICATION Lightweight Version

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 50mm x 48 kg/m³

over bulkhead plate and stiffeners.

INSTALLATION: The blanket is held by ø3mm x 70mm steel

welded pins and speed clips.

The blanket is wrapped around the stiffeners

following the profile of the steel structure.


The blanket will be installed horizontally.

WEIGHT: 2.40kg/m²

CERTIFICATION: Lloyds Register - MED 1850118/M1

- SAS F180156/M1

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.



Tel: +44 (0)1744 887600 www.unifrax.com





Drg. Nr: 173072

Doc. Rev: 0

June 2018



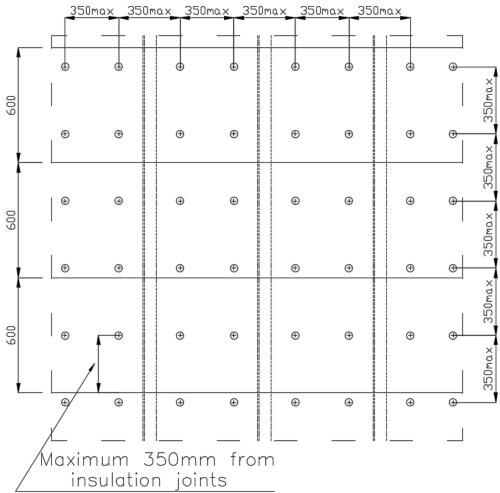

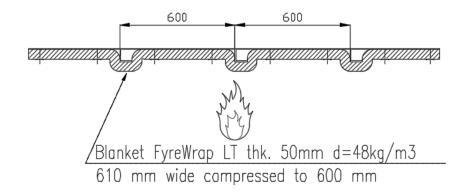

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

FIRE PROTECTION WITH INTEGRITY AND TRUST

