

Drg. Nr: 152936
Doc. Rev: 0
September 2017



A60 STEEL BULKHEAD (Single Layer System)

- MATERIAL:** FyreWrap LT Blanket
- INSULATION:** 1 layer of FyreWrap LT Blanket 60mm x 80 kg/m³ density installed over bulkhead plate and stiffeners.

Stiffeners to be packed with same material grade.
- INSTALLATION:** The blanket is held by ø3mm x 70 mm long steel welded pins and speed clips.
- WEIGHT:** 4.8 kg/m²
- CERTIFICATION:** Lloyds Register - MED 1750016 / M1
SAS F170031 / M1

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP


Tel: +44 (0)1744 887600
www.unifrax.com



Drg. Nr: 152936


Doc. Rev: 0

September 2017

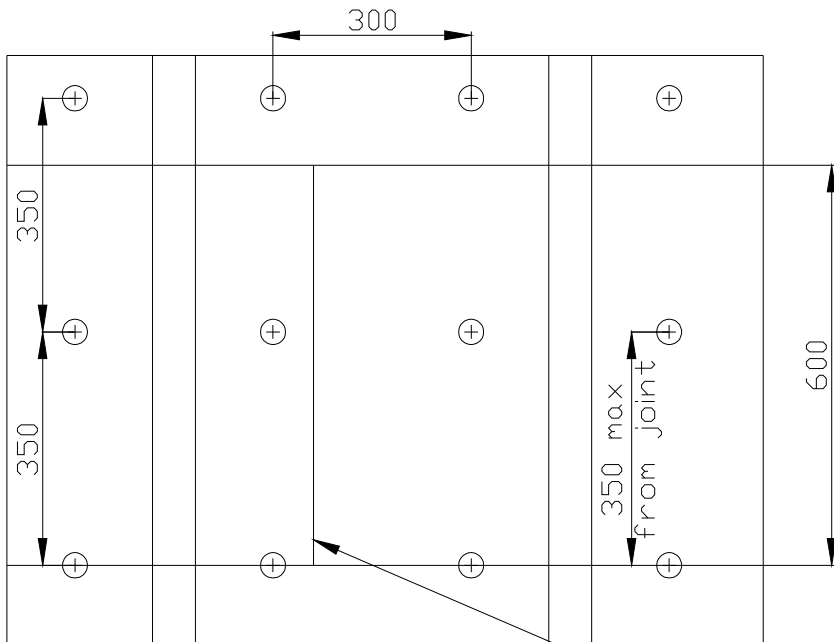

Note:

Blanket joint location may be placed at any point in between pins

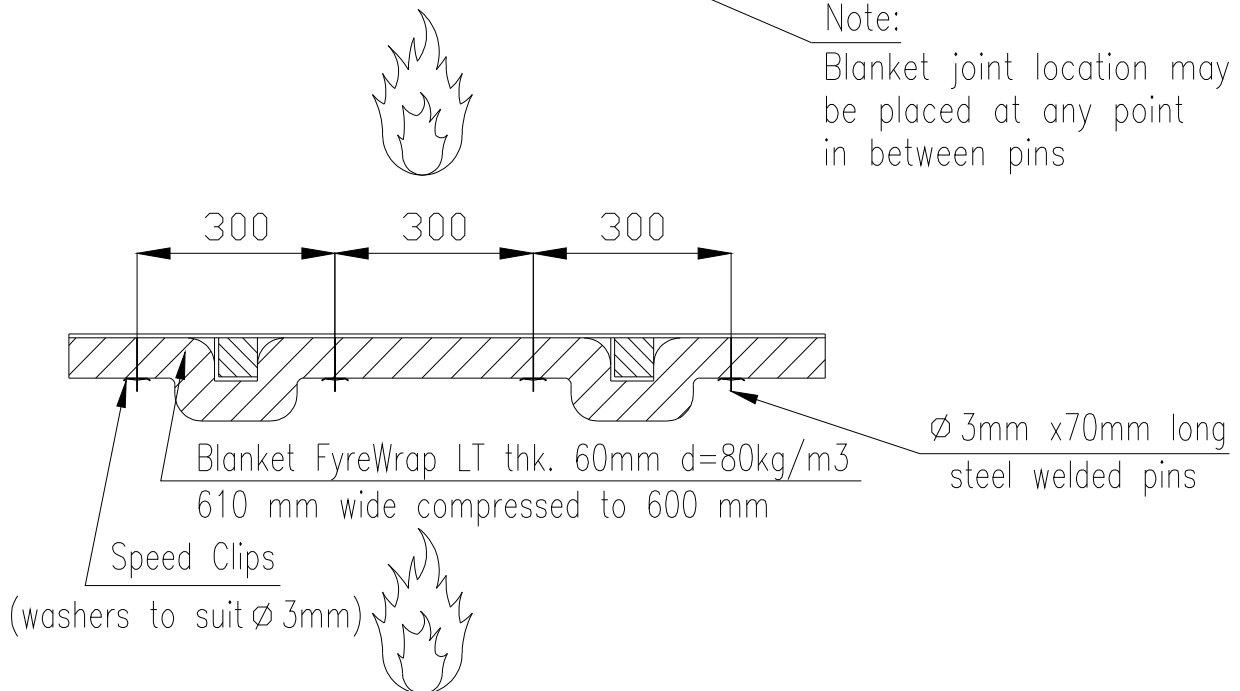

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

