

Drg. Nr: 152940  
Doc. Rev: 0  
September 2017



## A60 STEEL BULKHEAD (Wide Pin Spacing)

<b>MATERIAL:</b>	FyreWrap LT Blanket
<b>INSULATION:</b>	1 layer of FyreWrap LT Blanket 50mm x 64 kg/m <sup>3</sup> density installed vertically between stiffeners.  1 layer of FyreWrap LT Blanket 25mm x 64 kg/m <sup>3</sup> density installed horizontally over the stiffeners.
<b>INSTALLATION:</b>	The blanket is held by ø3mm x 90 mm long steel welded pins and speed clips.
<b>WEIGHT:</b>	4.8 kg/m <sup>2</sup>
<b>CERTIFICATION:</b>	Lloyds Register - MED 1750101 SAS F170129

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited  
Mill Lane, Rainford, St. Helens  
Merseyside  
England  
WA11 8LP



Tel: +44 (0)1744 887600  
www.unifrax.com



Drg. Nr: 152940

Doc. Rev: 0

September 2017

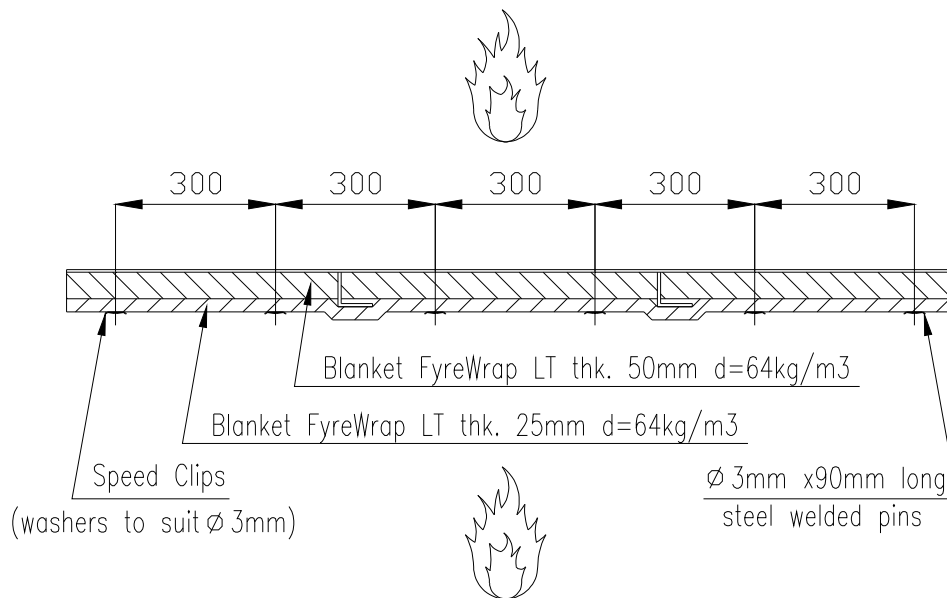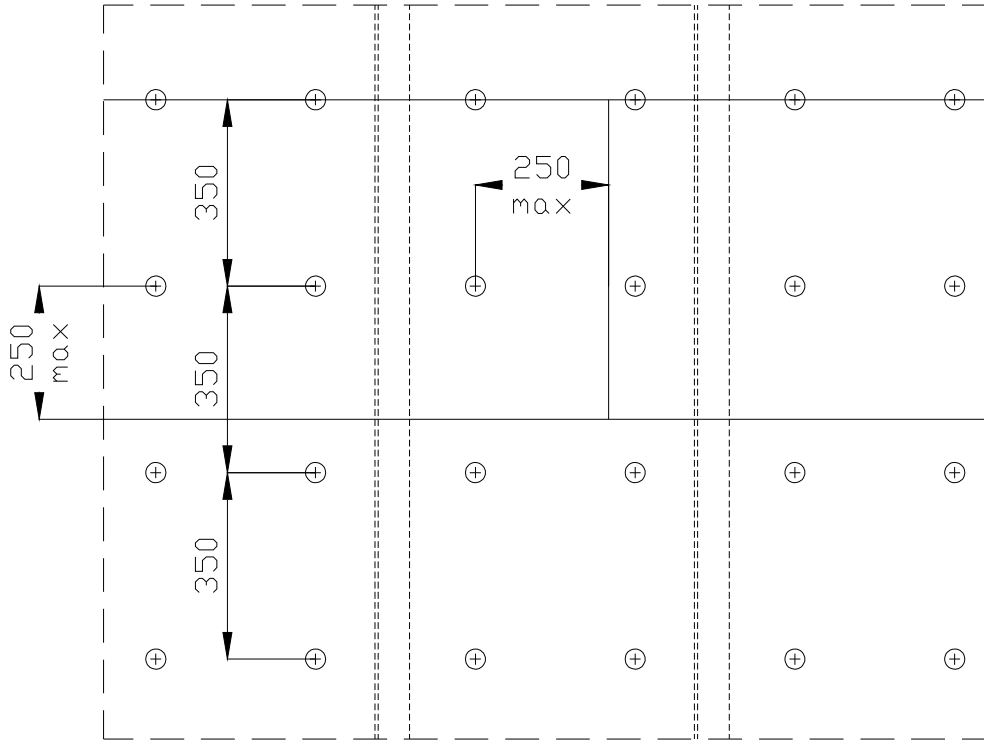

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

