

Drawing Ref:

FP-H4R2

July 2018

FyreWrap[®]

H60 BULKHEAD

General Application – Fire to Either Side

- MATERIAL:** FyreWrap[®] Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 3 layers of 25mm of 128 kg/m³ FyreWrap Blanket
or
2 layers of 38mm of blankets can be used
- INSTALLATION:** The blanket is held by Ø3mm steel welded pins and spring washers. The blankets are wrapped around the stiffeners following the profile of the steel structure.
- WEIGHT:** 9.6 kg/m²
- CERTIFICATION:** LR – SAS F180116

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP

Tel: +44 (0)1744 887600
www.unifrax.com




Drawing Ref:

FP-H4R2

July 2018

FyreWrap®

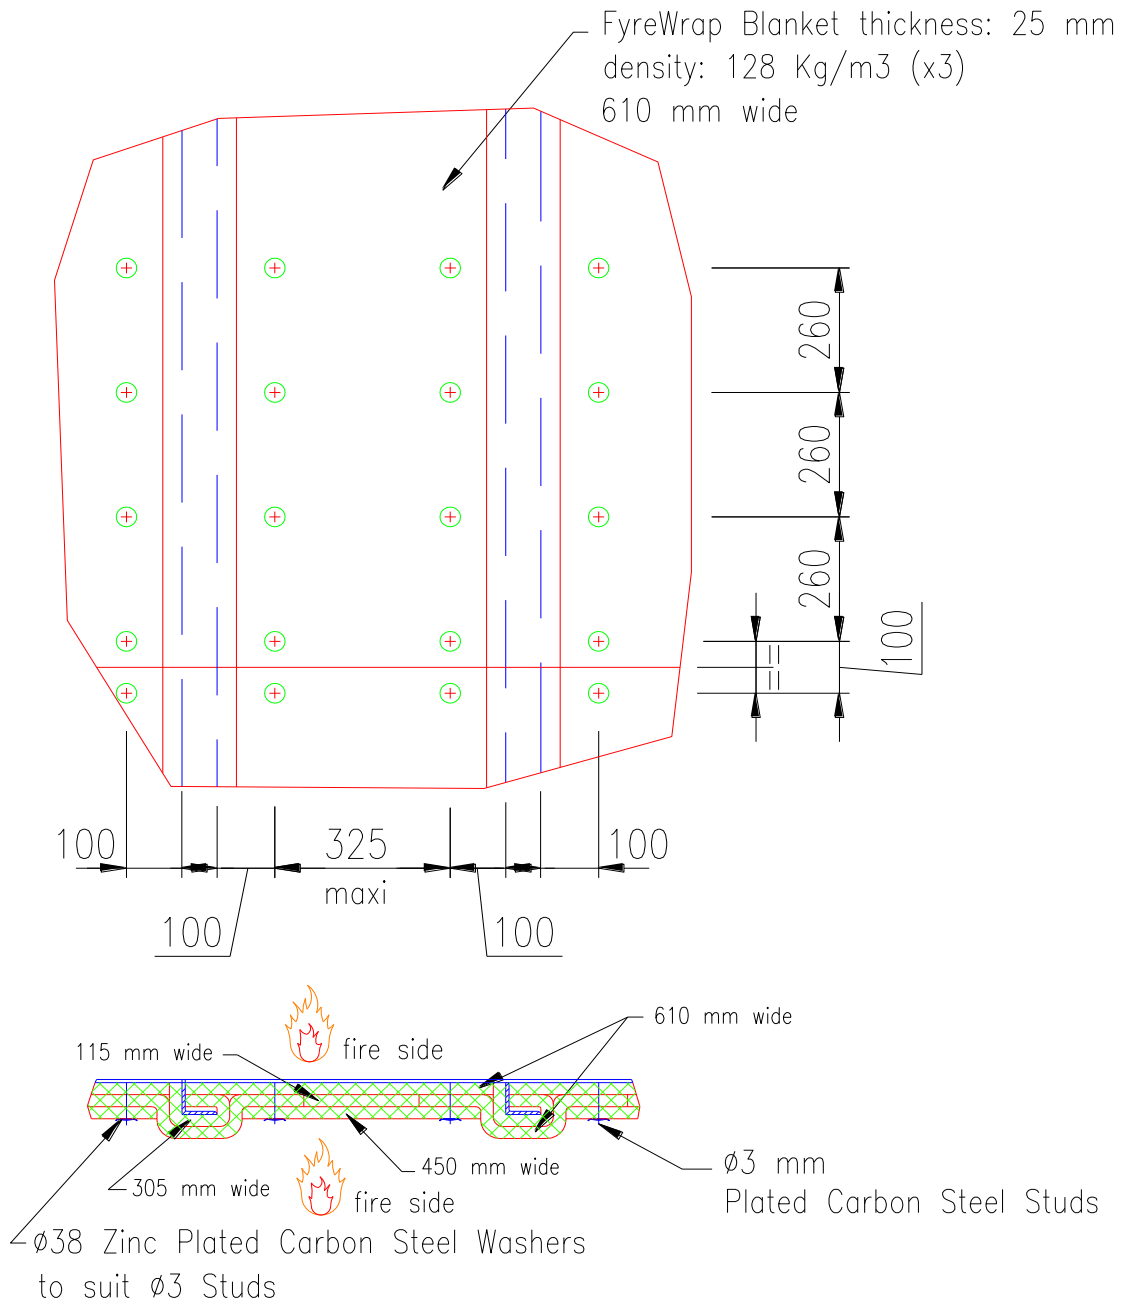

Also approved for corrugated steel profiles –
please contact your local office

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**