

## H120 Steel Bulkhead

- MATERIAL:** FyreWrap LT Blanket
- INSULATION:** 3 layers of FyreWrap LT Blanket 50mm x 70 kg/m<sup>3</sup>
- INSTALLATION:** The blanket is held by ø3mm steel welded pins and speed clips.

Steel welded pins are typ. 170 mm long.

The first layer is installed vertically between the stiffeners. The second and third layer's are installed horizontally following the profile of the steel structure.

- WEIGHT:** 10.5 kg/m<sup>2</sup>
- CERTIFICATION:** Lloyds Register - SAS F180180



This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.



Typical joint in third layer – half way between pins

Typical joint in first layer – half way between pins

Typical joint in second layer – half way between pins

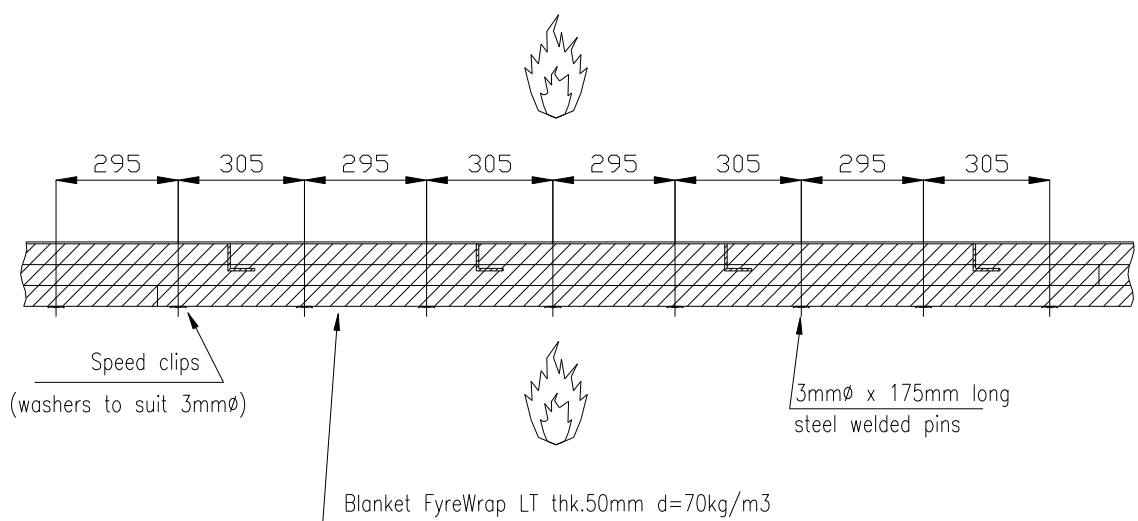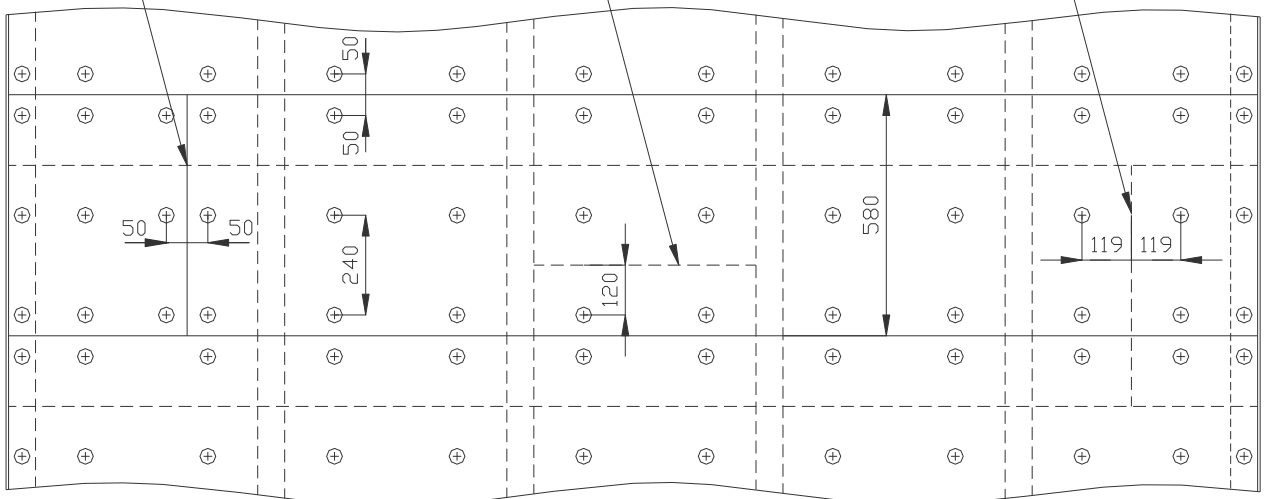

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

