

H120 Steel Bulkhead

Restricted Application

MATERIAL: FyreWrap[®] LT Blanket

INSULATION: 2 layers of FyreWrap LT Blanket 50mm x 70 kg/m³

1 strip of 250mm wide blanket installed vertically over the stiffeners.

INSTALLATION: The blanket is held by ø3mm steel welded pins and speed clips.

Steel welded pins are typ. 120 mm long.

The first layer is installed vertically between the stiffeners. The second layer is installed horizontally following the profile of the steel structure.

WEIGHT: 7.0kg/m²



CERTIFICATION: Lloyds Register - SAS F180145

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1372-R3-08 Rev. 2

July 2018

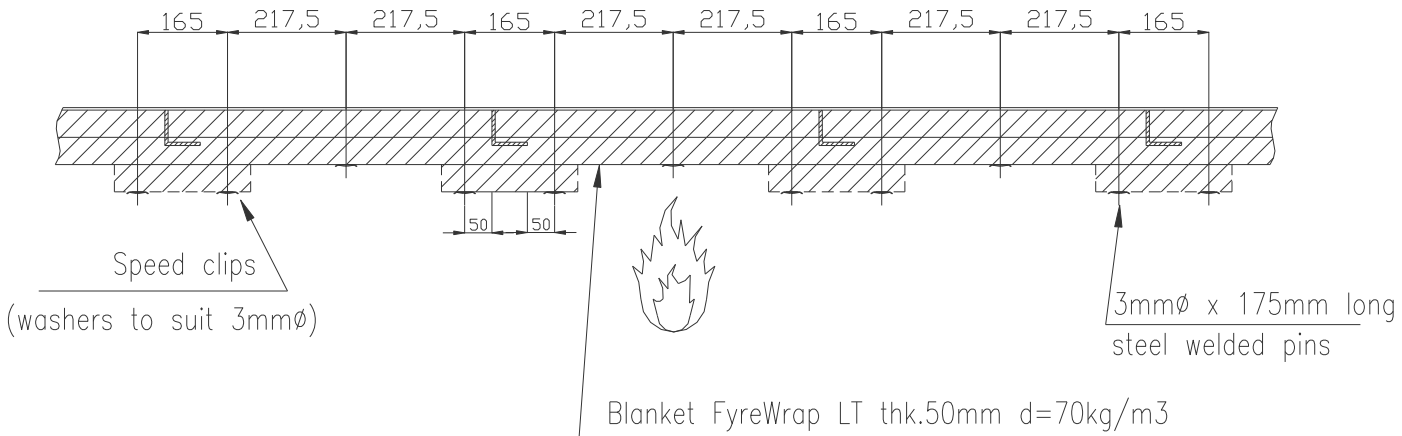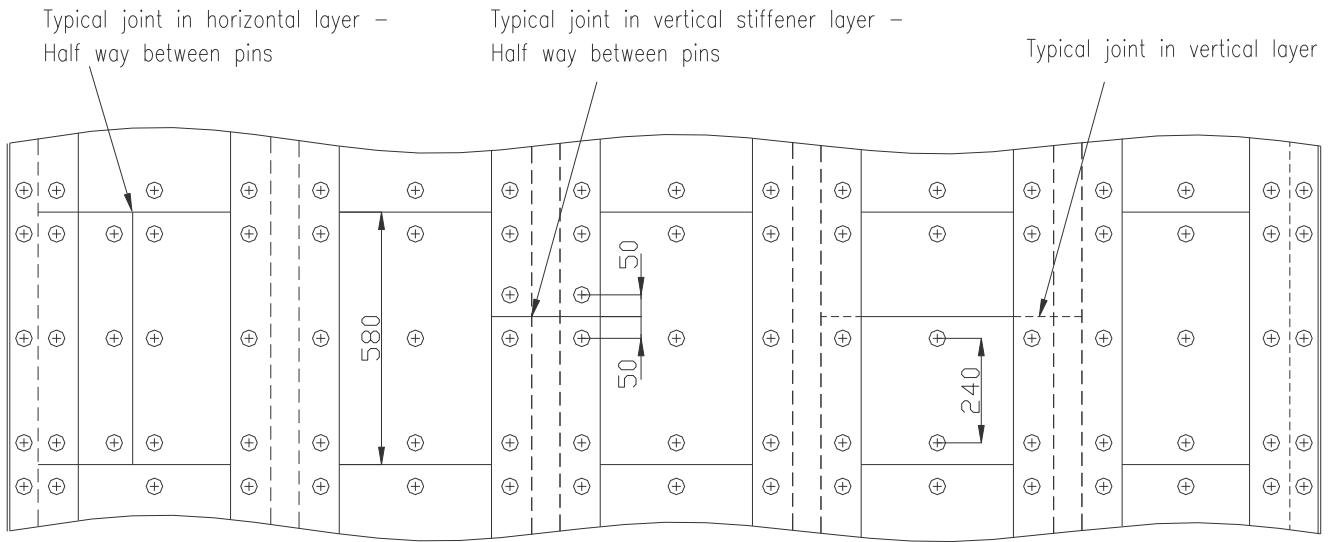

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

