

## A15 STEEL DECK

**MATERIAL:** FyreWrap LT Blanket

**INSULATION:** 1 layer of FyreWrap LT Blanket 15mm x 64 kg/m<sup>3</sup> density over deck plate and stiffeners.

**INSTALLATION:** The blanket is held by ø3mm x 30mm steel welded pins and speed clips.



The blanket is wrapped around the stiffeners following the profile of the aluminum structure.

The blanket will be installed horizontally.

**WEIGHT:** 0.96kg/m<sup>2</sup>

**CERTIFICATION:** Lloyds Register - MED 1850072  
- SAS F180108

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

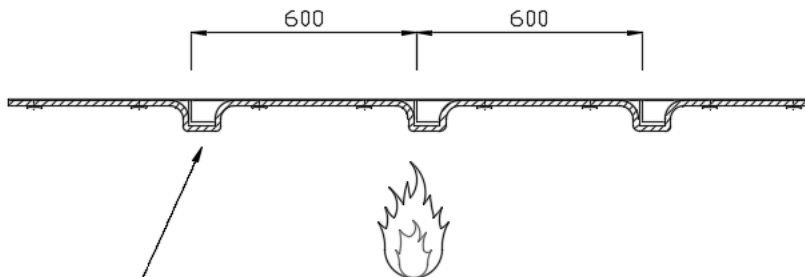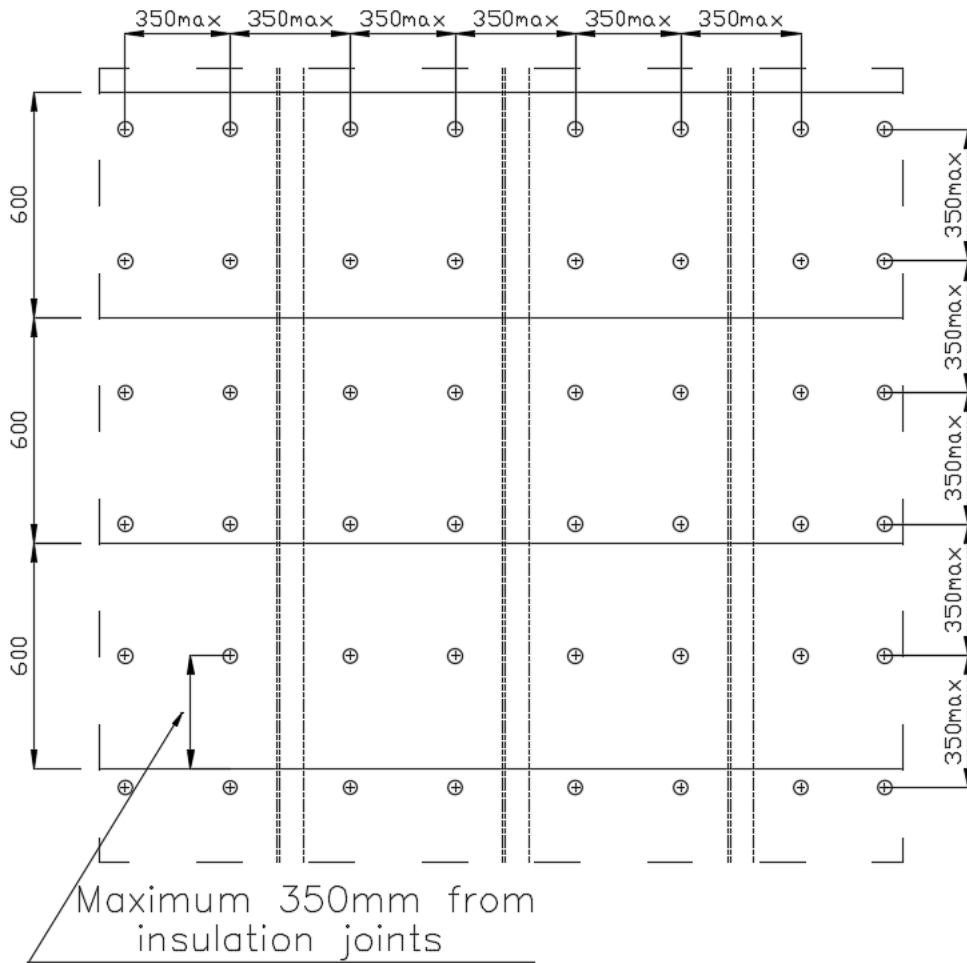

Blanket FyreWrap thk. 15mm  $d=64\text{kg/m}^3$   
610 mm wide compressed to 600 mm

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

