


Drawing Ref:
FP-14011 Rev. 2
June 2014



0062



A60 STEEL BULKHEAD

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 50mm x 64 kg/m³
density installed vertically between stiffeners.

1 layer of FyreWrap LT Blanket 25mm x 64 kg/m³
density installed horizontally over the stiffeners.

INSTALLATION: The blanket is held by \varnothing 3mm x 90 mm long steel
welded pins and speed clips.

WEIGHT: 4.8 kg/m²


CERTIFICATION: DNV.GL F-20942
Lloyds Register - MED 1450199/M1
SAS F140297/M1

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.


Drawing Ref:

FP-14011 Rev. 2

June 2014



0062

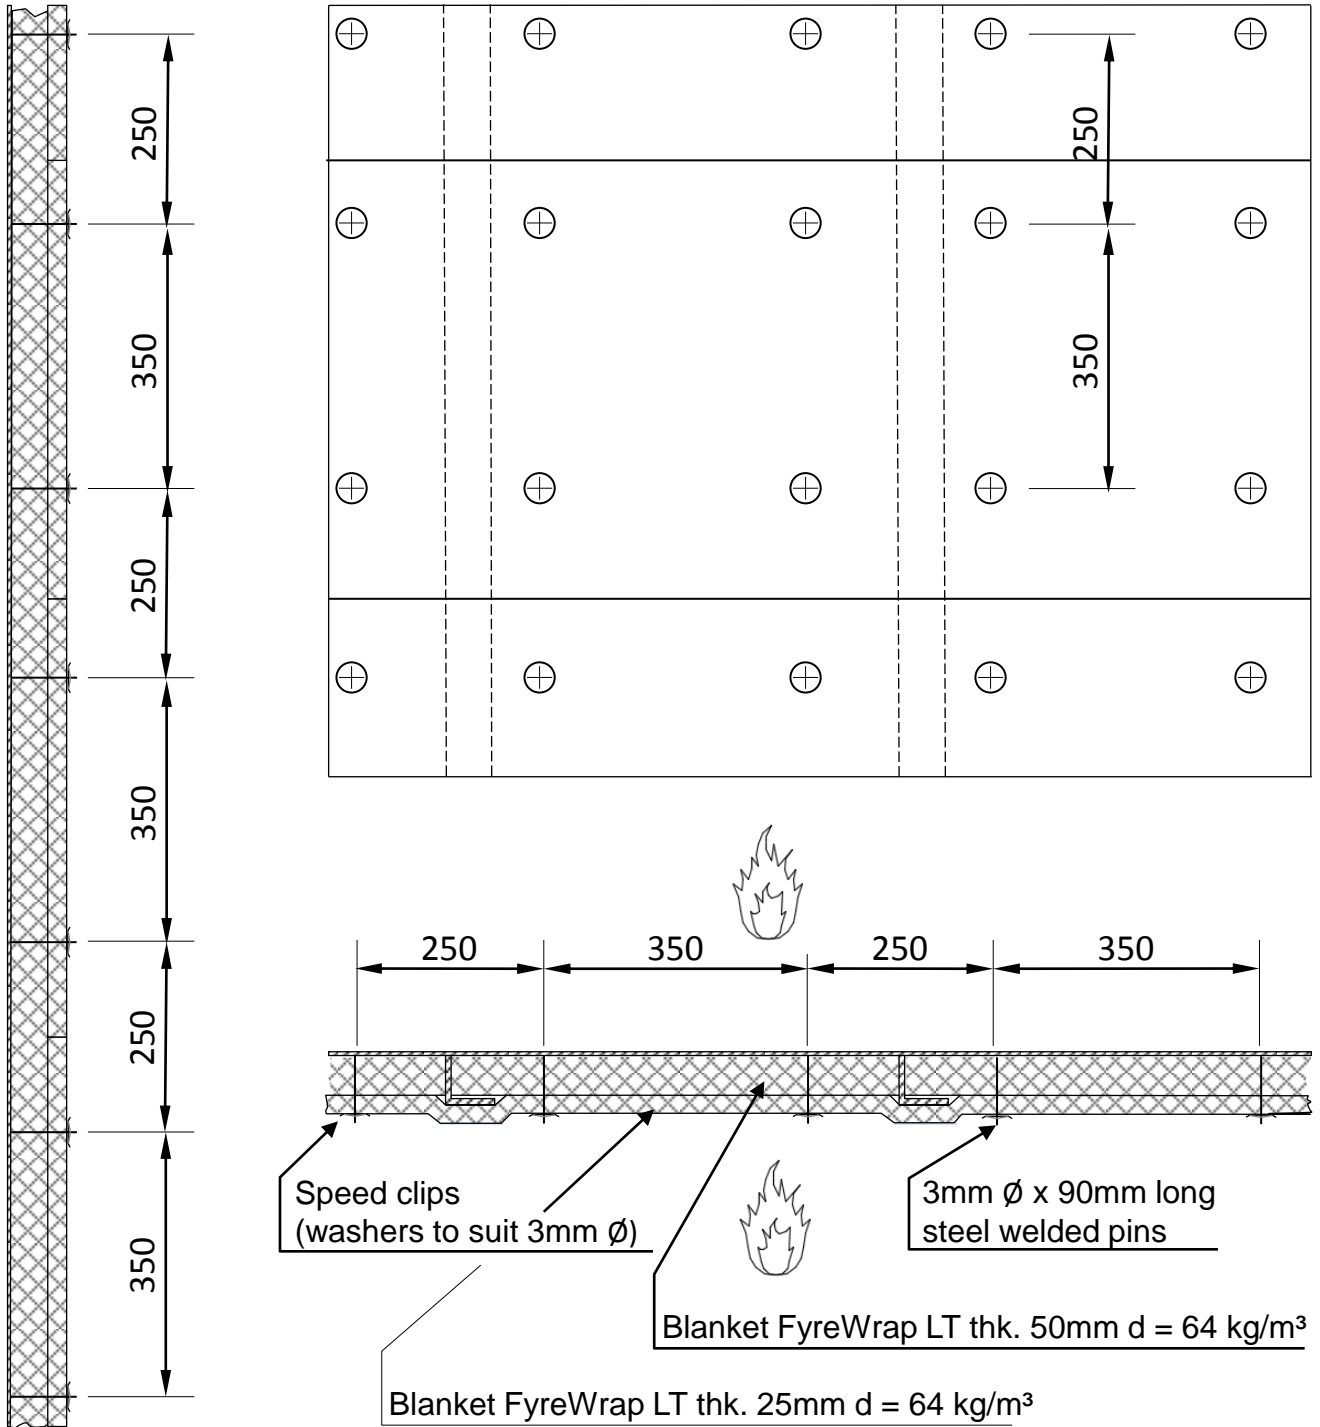

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

