

Drg. Nr: 152942
Doc. Rev: 0
September 2017



A60 STEEL DECK (Wide Pin Spacing)

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 45mm x 64 kg/m³
density over deck plate and stiffeners.

INSTALLATION: The blanket is held by ø3mm steel welded pins and
speed clips.

The blanket is wrapped around the stiffeners
following the profile of the aluminum structure.

The blanket will be installed horizontally.

WEIGHT: 2.88kg/m²

CERTIFICATION: Lloyds Register - MED 1750100
- SAS F170128

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP


Tel: +44 (0)1744 887600
www.unifrax.com



Drg. Nr: 152942


Doc. Rev: 0

September 2017

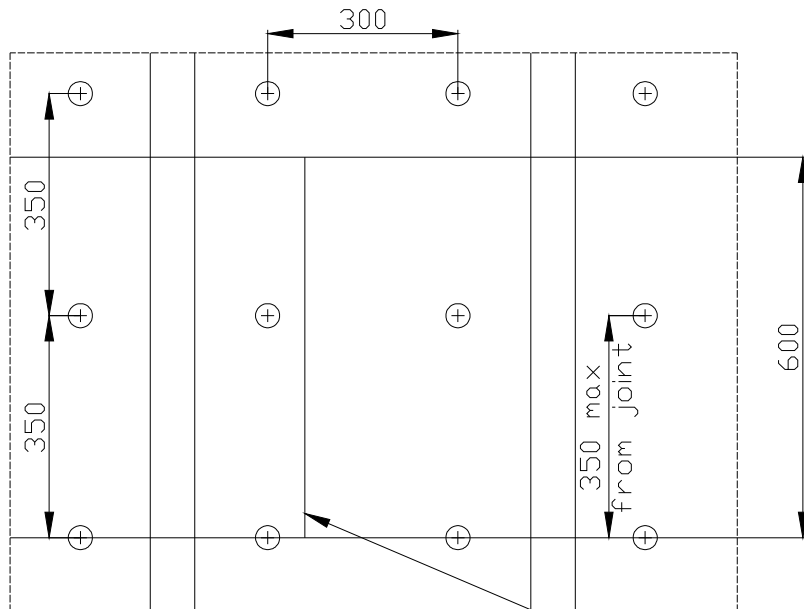

Note:

Blanket joint location may be placed at any point in between pins

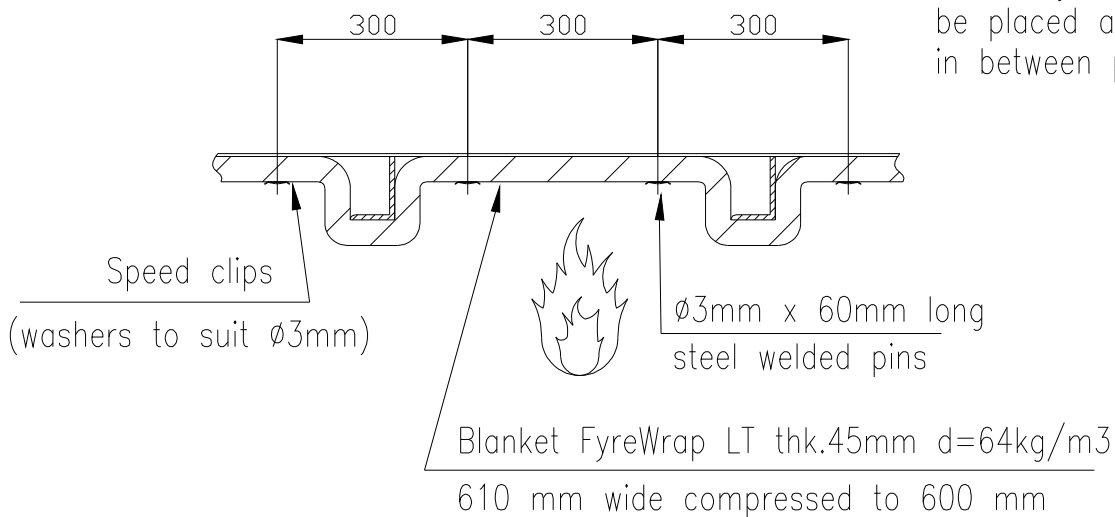

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

