


Drawing Ref:

FP-A1.4R3

October 2016



0062

FyreWrap
Fire protection materials

A60 STEEL BULKHEAD (RESTRICTED)

- MATERIAL:** FyreWrap® Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of 38mm of 96 kg/m³ FyreWrap® Blanket wrapped around the stiffeners following the profile of the steel structure.
- INSTALLATION:** The blanket is held by Ø3mm x 50mm long steel welded pins and speed clip washers
- WEIGHT:** 3.65 kg/m²
- CERTIFICATION:** DNV.GL TAF00000BH
DNV.GL MEDB000012B

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP


Tel: +44 (0)1744 887600
Fax: +44 (0)1744 6443
www.unifrax.com

UNIFRAX

Drawing Ref:

FP-A1.4R3


October 2016



0062

FyreWrap
Fire protection materials

FyreWrap® Blanket Thickness: 38mm
Density: 96 kg/m³
610mm wide compress to 580mm

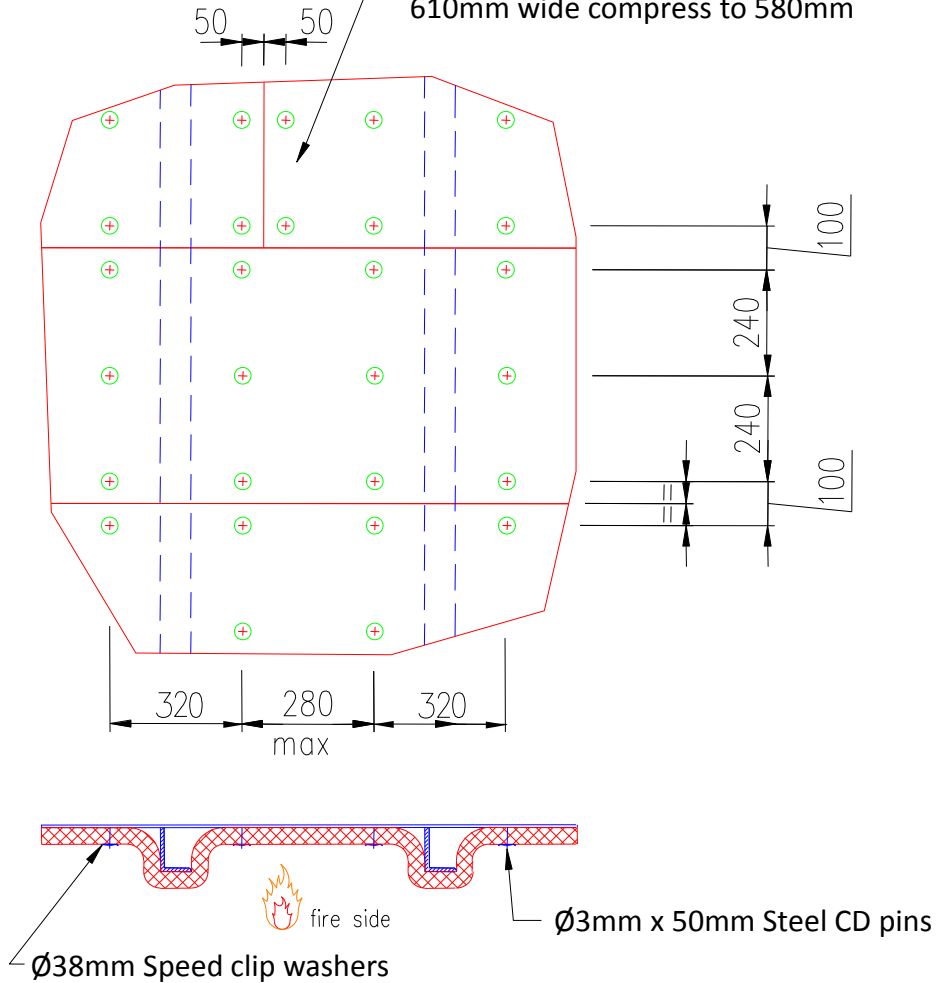

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

UNIFRAX