



Product Information Sheet

FyreWrap® DPS Insulation Dryer Protection System

Introduction

Unifrax's FyreWrap® DPS Insulation is a high-temperature insulation blanket specifically designed, UL tested and certified to provide a single layer, one-hour rated flexible enclosure around dryer and residential kitchen exhaust ductwork.

Dryer Exhaust Applications

FyreWrap DPS is an innovative product that provides a safe and cost-effective means to achieve a one-hour fire resistance rated zero clearance enclosure for routing dryer ductwork, from start to finish, through rated wood truss/joist construction as prescribed by the International Building and Mechanical Codes.

FyreWrap DPS Insulation offers the following product features:

- Lightweight, flexible product form
- Scrim encapsulated
- Easy to cut, fabricate, wrap around ducts, pipes or cables
- Thin, single-layer design
- High-temperature, low biopersistance fiber

Product Components

Core Material: FyreWrap DPS Insulation incorporates Insulfrax® Thermal Insulation as its core material. Insulfrax is a high-temperature insulation made from a calcia, magnesia, silica chemistry designed to enhance biosolubility. It provides excellent insulation in a noncombustible blanket product form.

Typical System Properties

ISO 6944	UL Assembly Nos. V-32 & V-38, ULC Assembly No. FRD-29	
UL 1479 (ASTM E814), CAN/ULC S115	UL Assembly Nos. F-C-7057, F-C-7058	
Intertek Laboratories Listed	Applied Fire Protection, File 16341-3	
ASTM E136 Noncombustibility Test	Passes	
ASTM E84, UL 723, ULC-S102	UL File No. R14514	
	Unfaced Blanket	Encapsulated
Flame Spread Rating:	Zero	<25
Smoke Developed Rating:	Zero	<50



FyreWrap® DPS Insulation – Dryer Protection System

Encapsulating Material: The core insulation blanket is completely encapsulated in an aluminum foil, fiberglass reinforced scrim covering. This scrim provides additional handling strength as well as protection from moisture absorption and tearing.

Typical Product Properties

Thickness	1/2"
Density	8pcf
Covering	Scrim Encapsulated
Product Availability	16"w x 25LF 24"w x 25LF 26"w x 25LF 48"w x 25LF



Intertek



INTERNATIONAL FIRESTOP COUNCIL
THE SOURCE OF FIRESTOP EXPERTISE®

Data are average results of tests conducted under standard procedures and are subject to variation. Results should not be used for specification purposes.

Refer to the product Safety Data Sheet (SDS) No. M0456 for recommended work practices and other product safety information.

Installation

FyreWrap DPS Insulation consists of a single-layer system applied directly on to the surface of the duct or combustible item.

Dryer Applications

Install the insulation around the duct to provide a tightly compressed butt joint or 1" overlap on all material seams. The 16" width DPS product facilitates linear installation around 4" diameter dryer ductwork without material cutting or scrap. The same technique can be used with wrapping 26" wide FyreWrap DPS on 7" diameter dryer ductwork. To temporarily secure the insulation, optional use of foil tape is permitted. Seal all cut edges and seams with aluminum foil tape to ensure there is no exposed fiber. 18 gauge steel tie wire should be utilized for permanent attachment.

Locate the wire 1/2" from the blanket edge and on maximum 12" centers. Twist tension the wire to firmly hold the wrap system in place, but not so tight as to cut or damage the blanket. Installation details are provided below for additional illustration.


Unifrax has a wide range of FyreWrap fire protection materials available to provide passive fire protection solutions in a variety of applications in the commercial building, industrial facility and transportation industries.

For additional information about product performance or for assistance identifying the recommended product for your fire protection application, please contact Unifrax at 716-768-6500 and ask for Fire Protection Application Engineering.

FyreWrap® DPS– Dryer Protection System

FP-950

Figure 1: Max. 7" Dryer Duct, 1-Hour Enclosure

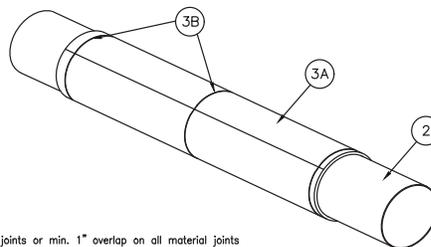


INSTALLATION NOTES:

- Tightly compressed butt joints or min. 1" overlap on all material joints
- Tie wire or banding on 12" centers and 1/2" from blanket edges
- Seal all cut edges and seams with aluminum foil tape


UL Assembly No. V-32, V-36, FRD-29

Figure 2: UL Tested 1-Hour Membrane Penetration

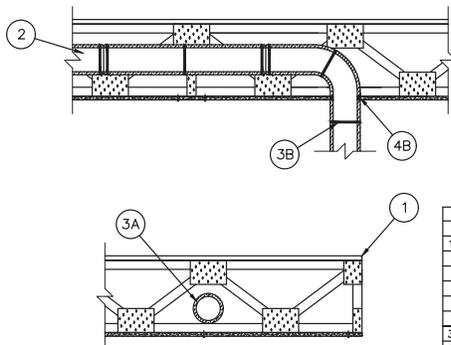

UL Assembly No. F-C-7058

Figure 3: UL Tested 1-Hour Dryer Duct System

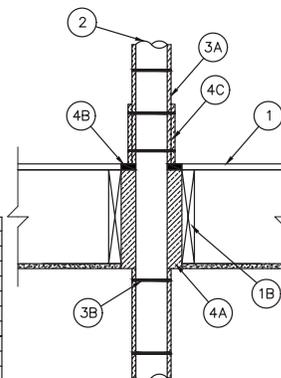

UL Assembly Nos. V-32, FRD_29, F-C-705Z

INSTALLATION NOTES:

- Tightly compressed butt joints or min. 1" overlap on all material joints
- Tie wire or banding on 12" centers and 1/2" from blanket edges
- Seal all cut edges and seams with aluminum foil tape

Legend:

1	1 Hr. UL Listed Floor/Ceiling Assembly
1B	Wood Joists – Nom 10 in. (or deeper) lumber, steel or combination lumber and steel joists, trusses or Structural Wood Members with bridging as required and with ends firestopped. Additional framing members installed to form a square enclosure around the perimeter of the opening in the floor and ceiling.
2	Max. 7" Dia. 30 ga. or 10" x 4" 26 ga. Duct
3A	FyreWrap® DPS Insulation, One Layer
3B	Min. 18 Gauge Steel Tie Wire or Min. 1/2" Wide Steel Banding
4A	FyreWrap Blanket (Foil Removed) Packed into Annular Space
4B	Fire Stop Sealant (STI SSS/LCI, HILTI FS-ONE, TREMCO FYRE-SIL)
4C	FyreWrap DPS Insulation Collar 12" Wide

The following is a registered trademark of Unifrax: FyreWrap, Insulfrax.

The test data shown are average results of tests conducted under standard procedures and are subject to variation. Results should not be used for specification purposes. Product Information Sheets are periodically updated by Unifrax. Before relying on any data or other information in this Product Information Sheet, you should confirm that it is still current and has not been superseded. A Product Information Sheet that has been superseded may contain incorrect, obsolete and/or irrelevant data and other information.

FyreWrap®

Unifrax

Corporate Headquarters
600 Riverwalk Parkway, Suite 120
Tonawanda, NY 14150
Telephone: 716-768-6500
Internet: www.unifrax.com
Email: info@unifrax.com