
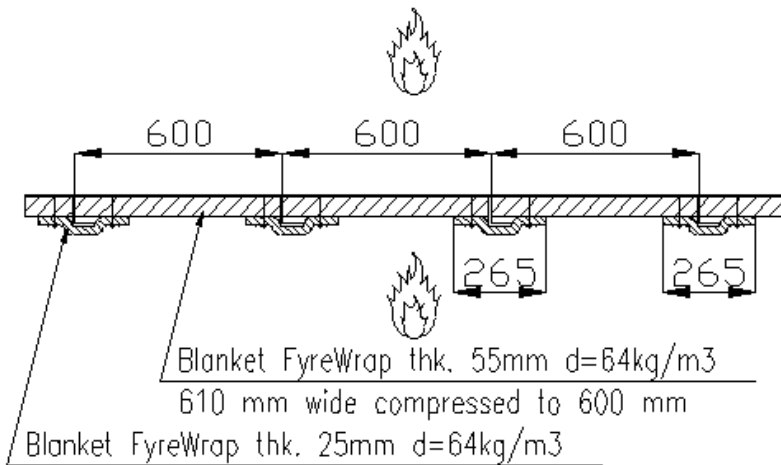


A60 STEEL BULKHEAD

- MATERIAL:** FyreWrap[®] Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of FyreWrap Blanket 55mm x 64 kg/m³
density over flat plate, between stiffeners.
- 1 layer of FyreWrap[®] Blanket 25mm x 64 kg/m³
density over the stiffeners in 265mm strips.
- INSTALLATION:** The blanket is held by ø3mm x 100 mm long (75 mm
between stiffeners) steel welded pins and speed clips.
- The blanket is installed vertically.
- WEIGHT:** 3.52 kg/m²
- CERTIFICATION:** DNV-GL TAF00000H1
DNV-GL MEDB000011W

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

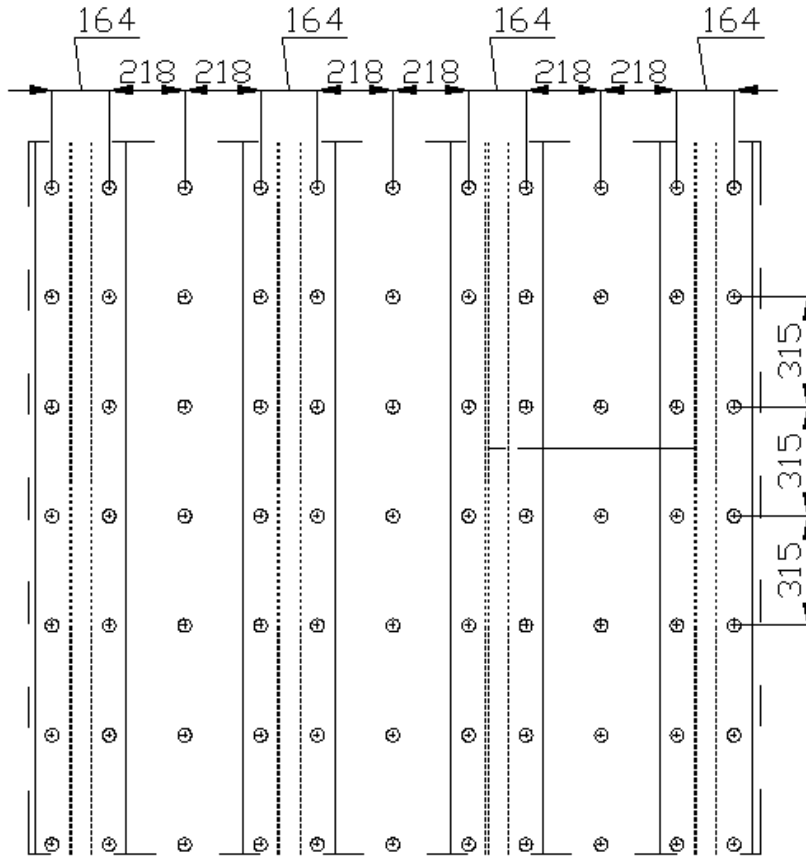

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

