
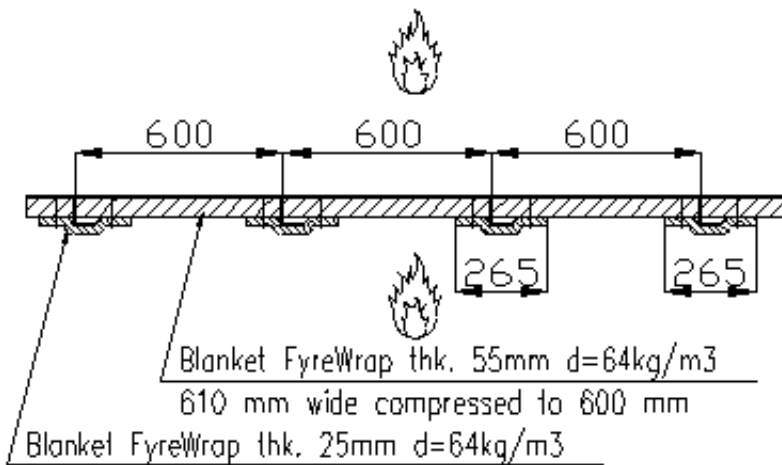


A60 STEEL BULKHEAD

MATERIAL:	FyreWrap [®] Blanket Grade S, SF, SFR, SG or WR variants.
INSULATION:	1 layer of FyreWrap Blanket 55mm x 64 kg/m ³ density over flat plate, between stiffeners. 1 layer of FyreWrap [®] Blanket 25mm x 64 kg/m ³ density over the stiffeners in 265mm strips.
INSTALLATION:	The blanket is held by ø3mm x 100 mm long (75 mm between stiffeners) steel welded pins and speed clips. The blanket is installed vertically.
WEIGHT:	3.52 kg/m ²
CERTIFICATION:	DNV-GL TAF00001F4 DNV-GL MEDB000011W

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

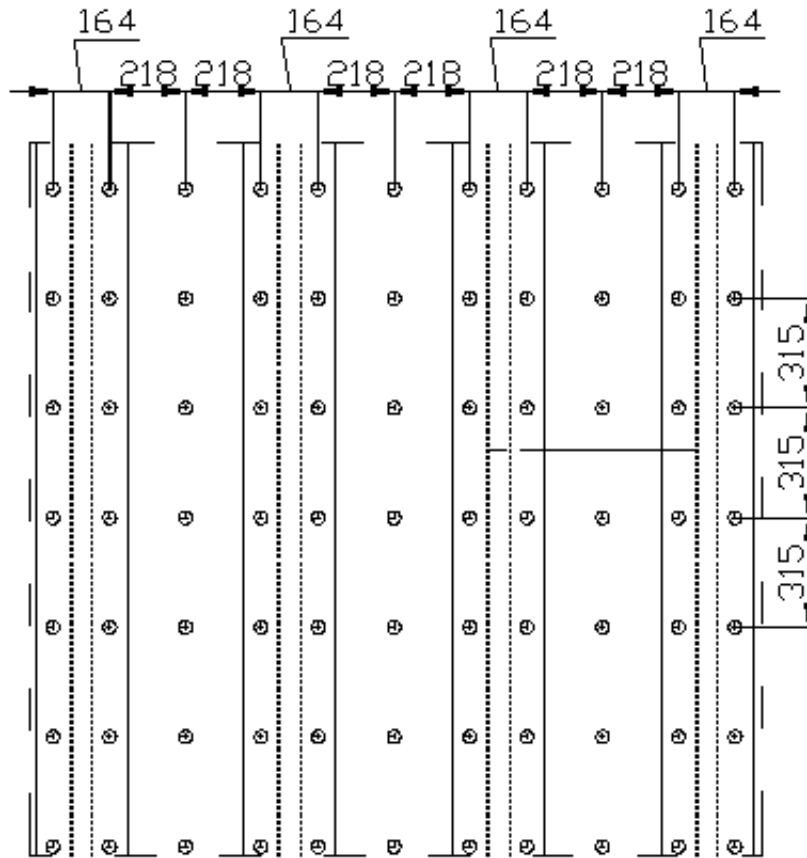

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

