

Drawing Ref:

FP-A1.6R3

January 2020

**FyreWrap®**

## A60 STEEL DECK

<b>MATERIAL:</b>	FyreWrap® Blanket Grade S, SF, SFR, SG or WR variants.
<b>INSULATION:</b>	1 layer of 38mm of 96 kg/m <sup>3</sup> FyreWrap® Blanket wrapped around the stiffeners following the profile of the steel structure.
<b>INSTALLATION:</b>	The blanket is held by Ø3mm x 50mm long steel welded pins and speed clip washers
<b>WEIGHT:</b>	3.65 kg/m <sup>2</sup>
<b>CERTIFICATION:</b>	DNV.GL TAF00000BF DNV.GL MEDB000009U

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited  
Mill Lane, Rainford, St. Helens  
Merseyside  
England  
WA11 8LP

Tel: +44 (0)1744 887600  
Fax: +44 (0)1744 6443  
www.unifrax.com




Drawing Ref:

FP-A1.6R3

January 2020

**FyreWrap®**

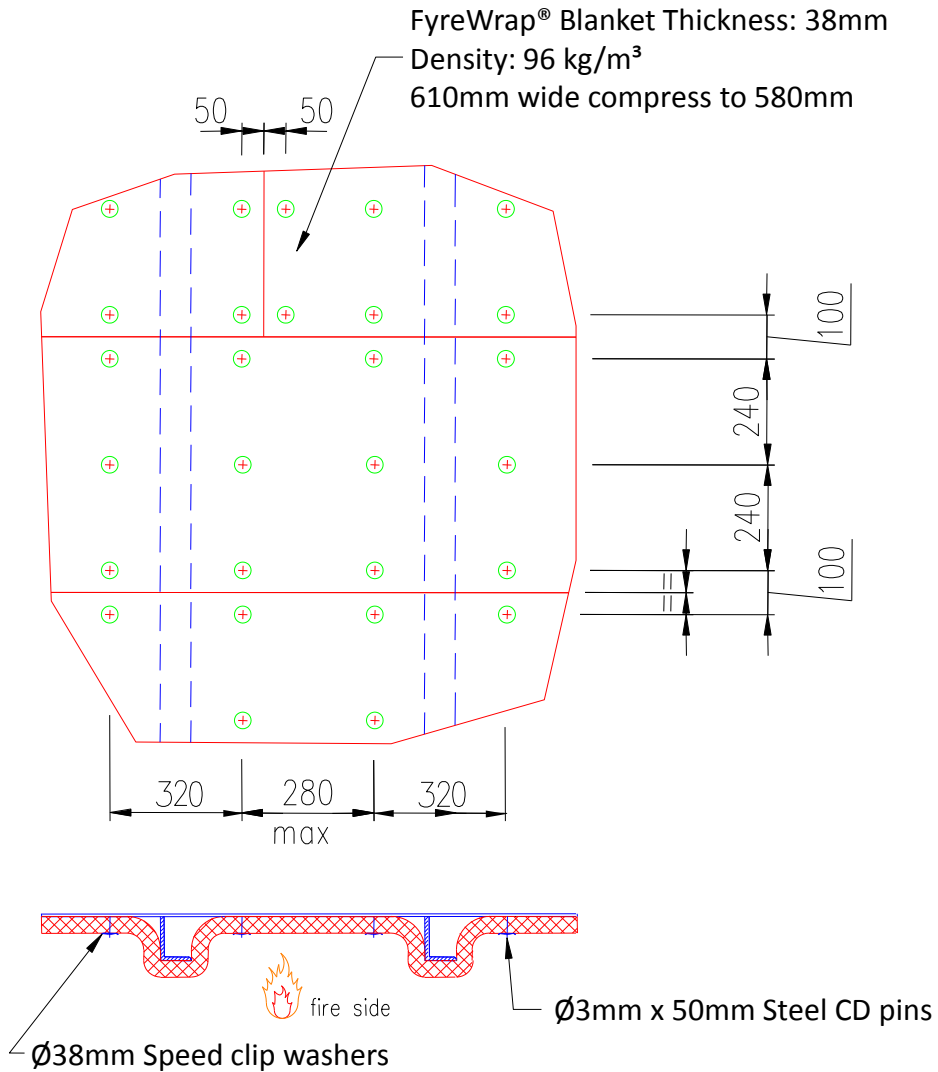

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

***FIRE PROTECTION WITH  
INTEGRITY AND TRUST***

**UNIFRAX**