**Drawing Ref: FP124 Edition A** 

Doc Rev: 0

October 2021



## A60 STEEL BULKHEAD (RESTRICTED)

**MATERIAL:** FyreWrap® Blanket

Grade S, SF, SFR, SG or WR variants.

**INSULATION:** 1 layer of 38mm of 96 kg/m³ FyreWrap® Blanket

wrapped around the stiffeners following the profile of

the steel structure.

**INSTALLATION:** The blanket is held by Ø3mm x 50mm long steel


welded pins and speed clip washers

**WEIGHT:** 3.65 kg/m<sup>2</sup>

**CERTIFICATION:** DNV.GL TAF00001F1

DNV.GL MEDB000012B

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.



Tel: +44 (0)1744 887600 Fax: +44 (0)1744 6443 www.unifrax.com





**Drawing Ref: FP124 Edition A** 

Doc Rev: 0

October 2021



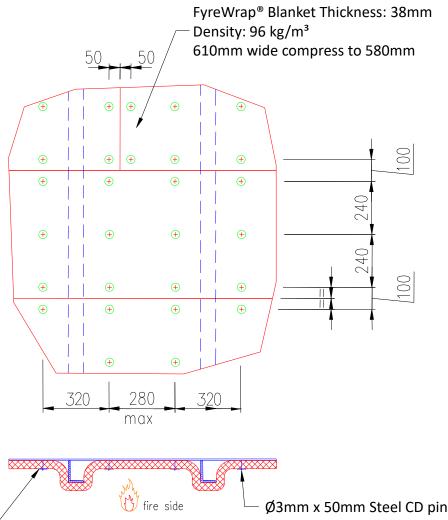



This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

FIRE PROTECTION WITH INTEGRITY AND TRUST

