


A60 STEEL DECK

- MATERIAL:** FyreWrap[®] Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of 38mm of 96 kg/m³ FyreWrap[®] Blanket wrapped around the stiffeners following the profile of the steel structure.
- INSTALLATION:** The blanket is held by Ø3mm x 50mm long steel welded pins and speed clip washers
- WEIGHT:** 3.65 kg/m²
- CERTIFICATION:** DNV.GL TAF00001F9
DNV.GL MEDB000009U

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

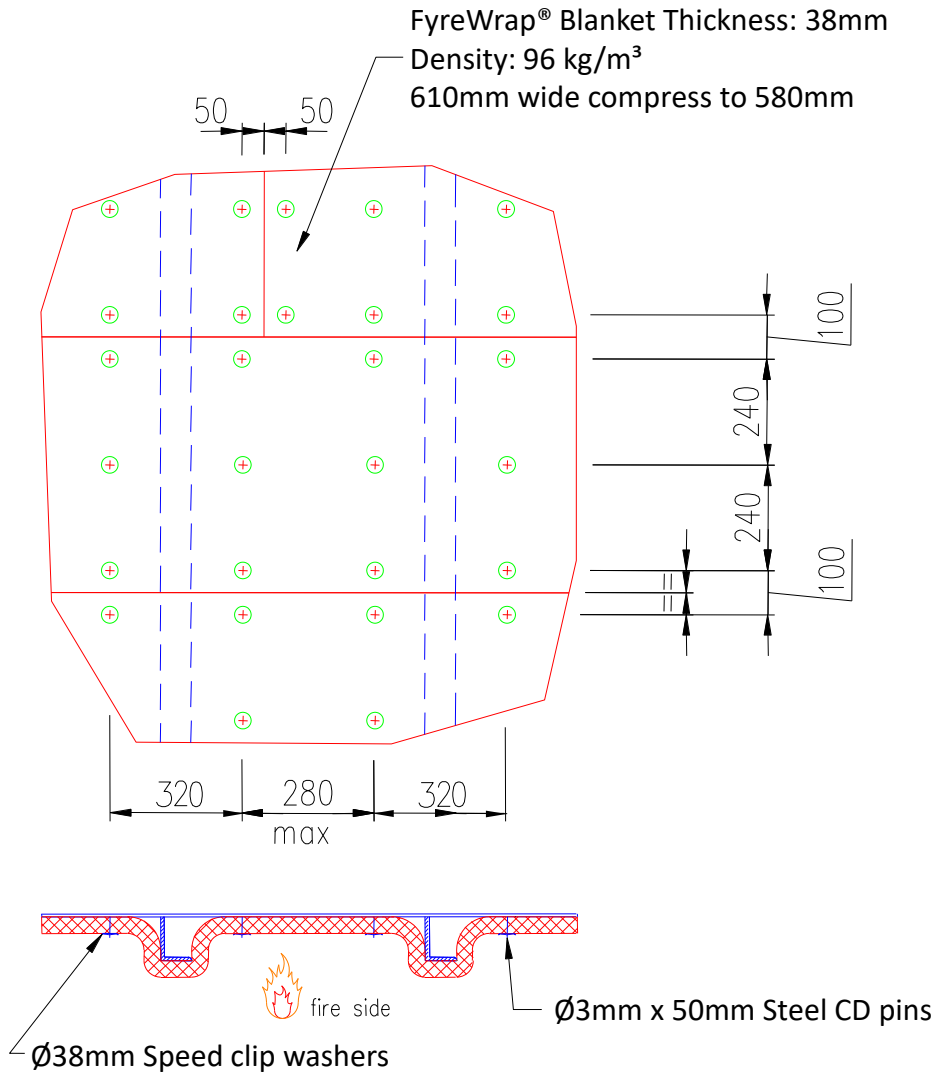

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

