

A60 STEEL BULKHEAD

MATERIAL: FyreWrap® Blanket
Grade S, SF, SFR, SG or WR variants.

INSULATION: 1 layer of FyreWrap® Blanket 55mm x 96 kg/m³
density over flat plate.

1 layer of FyreWrap® Blanket 25mm x 96 kg/m³
density over the stiffeners in 200mm strips.


INSTALLATION: The blanket is held by ø3mm x 90 mm long (70 mm
between stiffeners) steel welded pins and speed clips.

The blanket will be installed vertically.

WEIGHT: 5.28kg/m²

CERTIFICATION: DNV.GL TAF00001F0
DNV.GL MEDB000009S

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

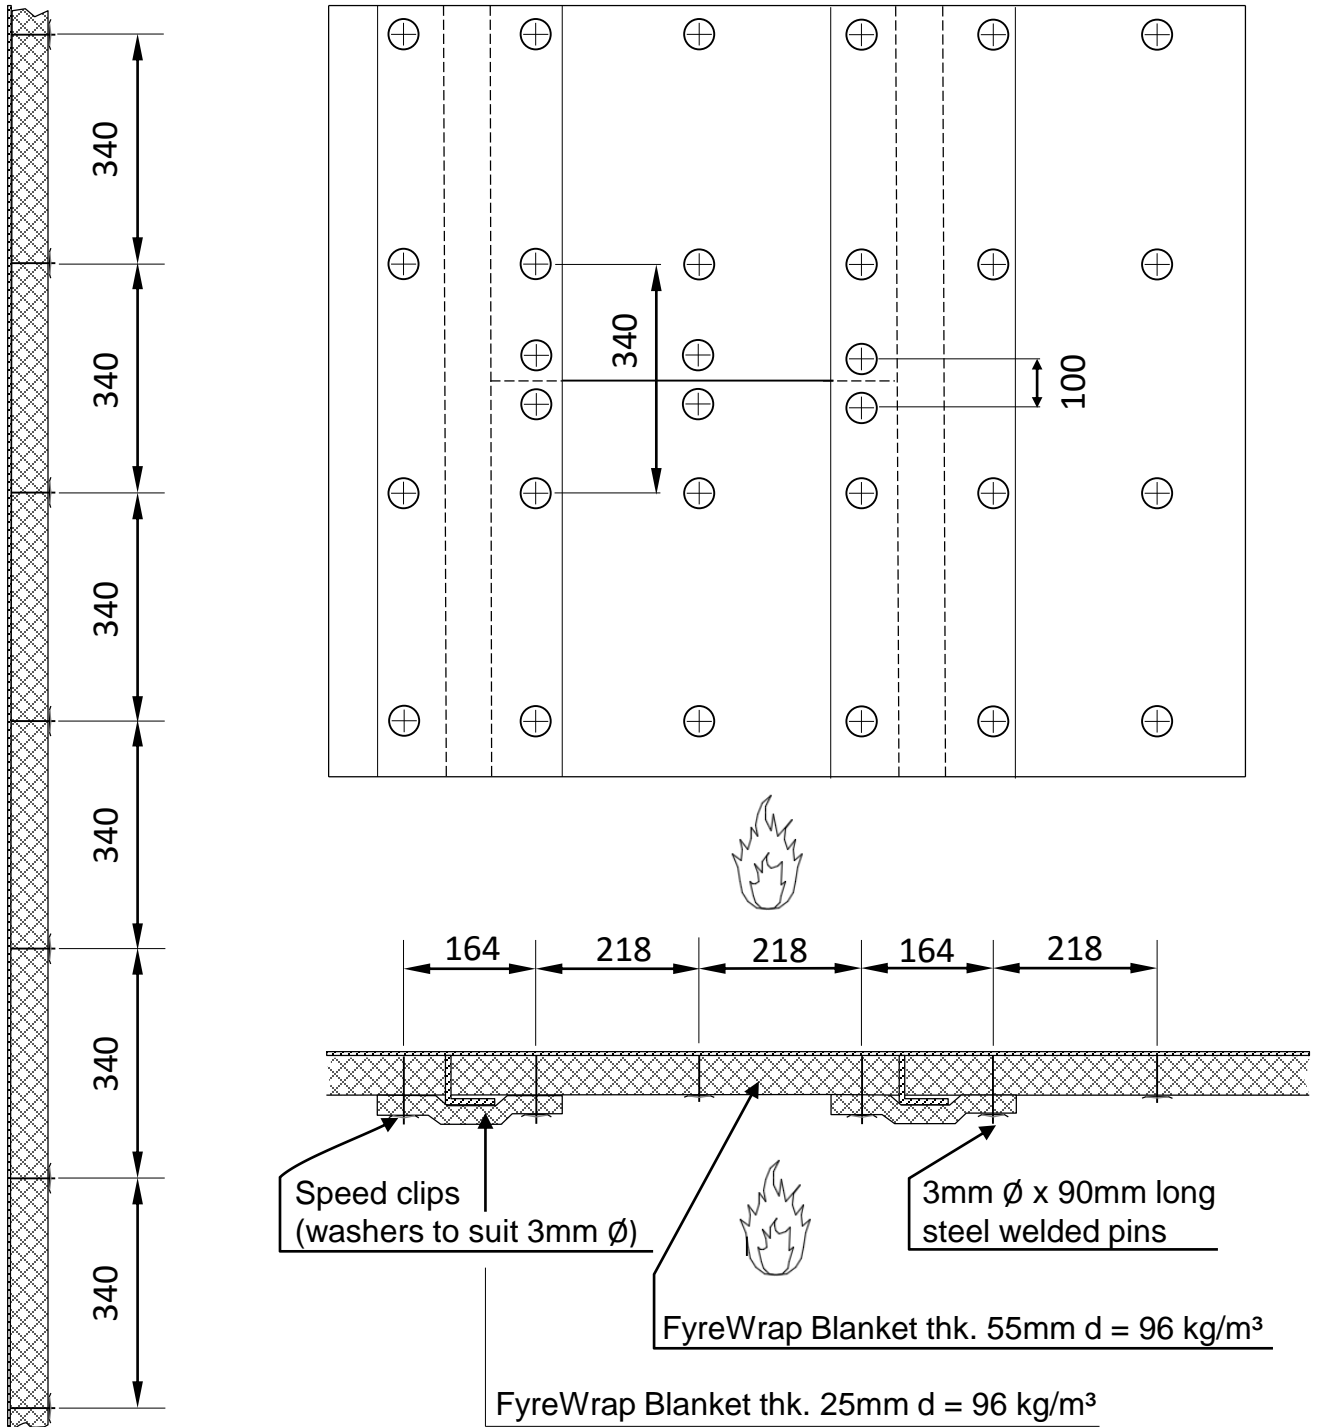

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

