
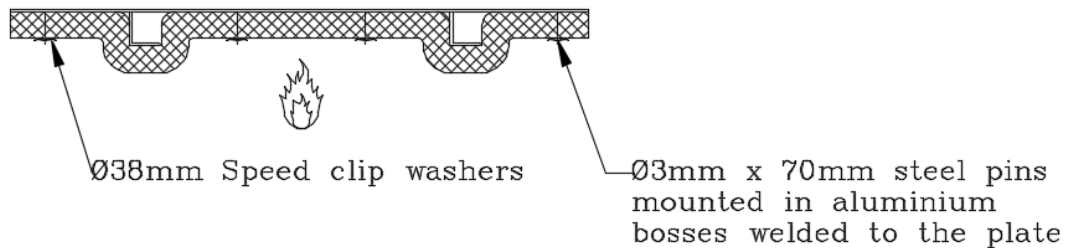


A60 ALUMINIUM BULKHEAD **(RESTRICTED APPLICATION - FIRE TO INSULATED SIDE)**

- MATERIAL:** FyreWrap[®] Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of 50mm of 96 kg/m³ FyreWrap Blanket wrapped around the stiffeners following the profile of the aluminium structure.
- INSTALLATION:** The blanket is held by bi-metallic pins (comprised of Ø3mm x 70mm long steel pins mounted in aluminium bosses welded to the plate) retained with Ø38 mm speed clip washers.
- WEIGHT:** 4.8 kg/m²
- CERTIFICATION:** DNV.GL MEDB00004A5
DNV.GL TAF00000FZ

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

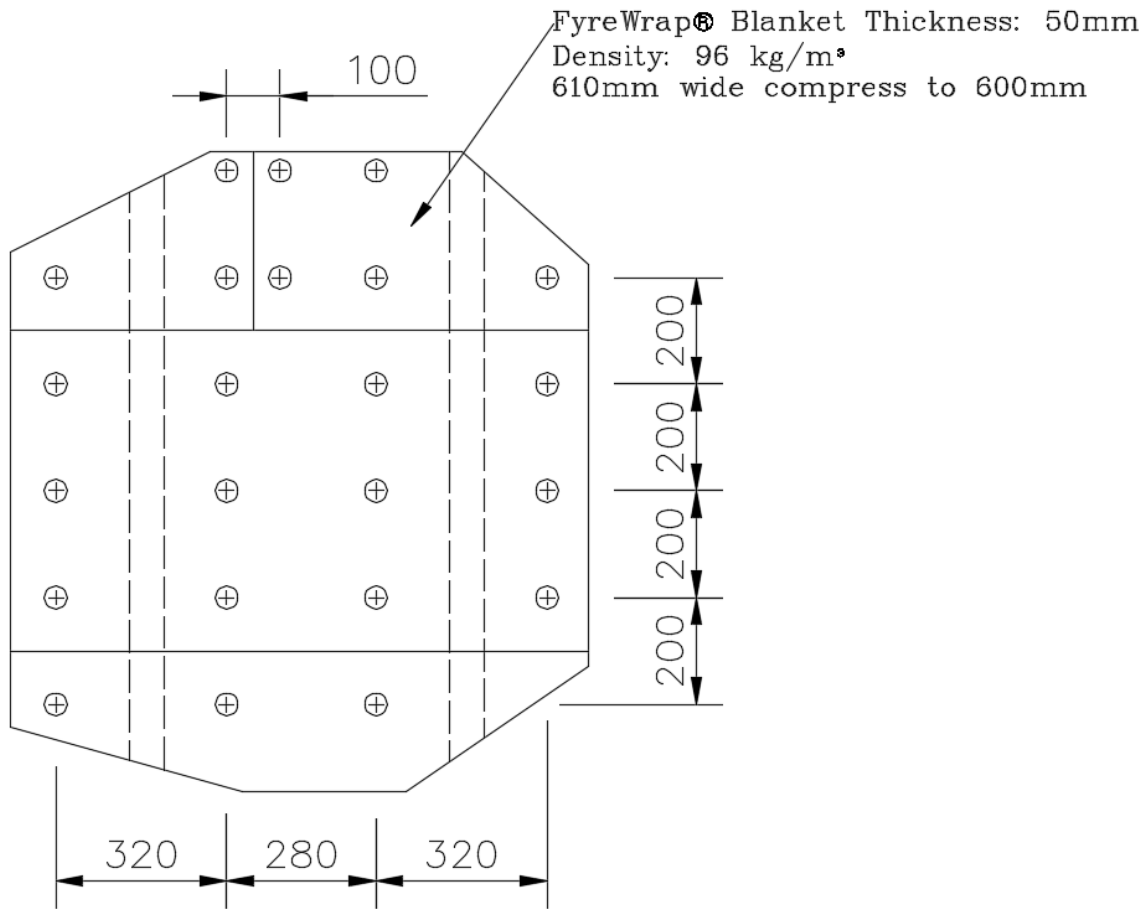

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

