

A30 STEEL BULKHEAD RESTRICTED APPLICATION

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 25mm x 64 kg/m³
density over deck plate.


1 layer of FyreWrap LT Blanket 25mm x 64 kg/m³
density over the stiffeners in 200mm strips.

INSTALLATION: The blanket is held by ø3mm x 70 mm long steel
welded pins and speed clips.
The blanket will be installed vertically.

WEIGHT: 1.60kg/m²

CERTIFICATION: Lloyds Register - MED 1850135
- SAS F180176

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

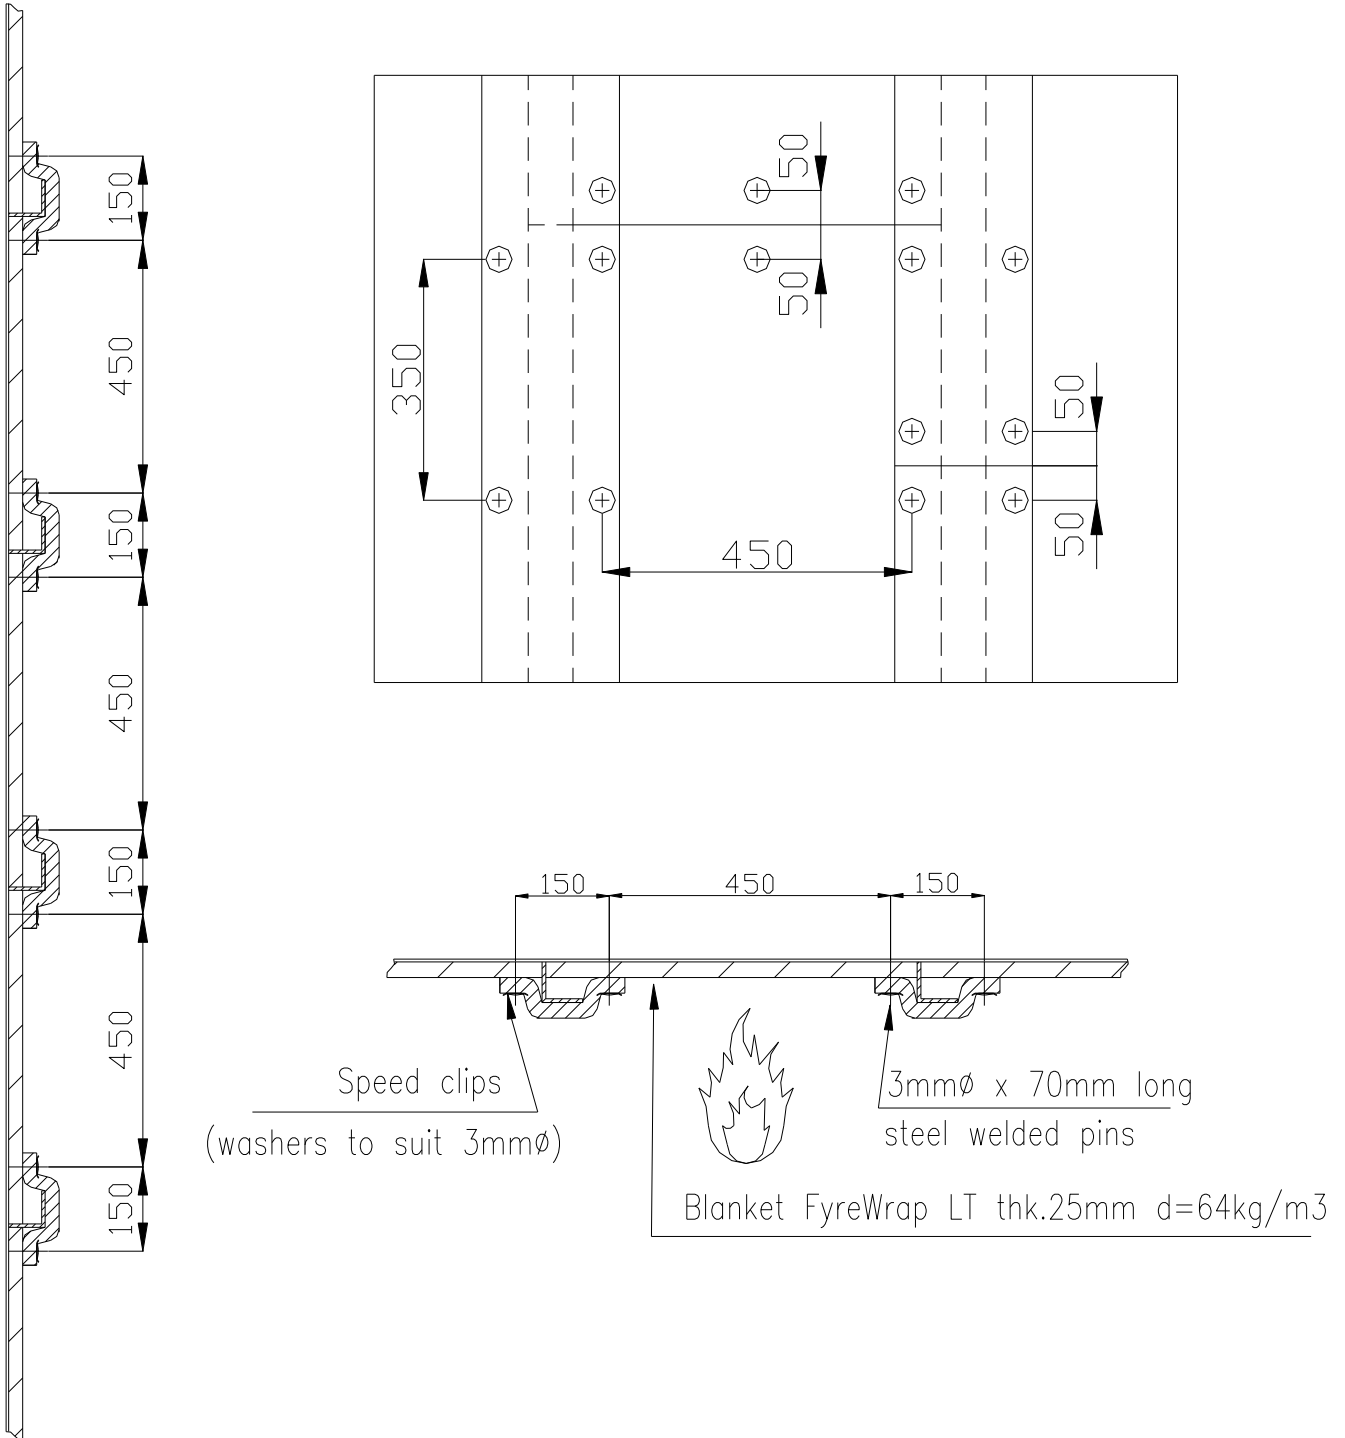

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**