

Drg. Nr: 152936

Doc. Rev: 1

July 2022



A60 STEEL BULKHEAD (Single Layer System)

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 60mm x 80 kg/m³ density installed over bulkhead plate and stiffeners.


Stiffeners to be packed with same material grade.

INSTALLATION: The blanket is held by ø3mm x 70 mm long steel welded pins and speed clips.

WEIGHT: 4.8 kg/m²


CERTIFICATION: Lloyds Register - LR22172287MB
LR22172286SF

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

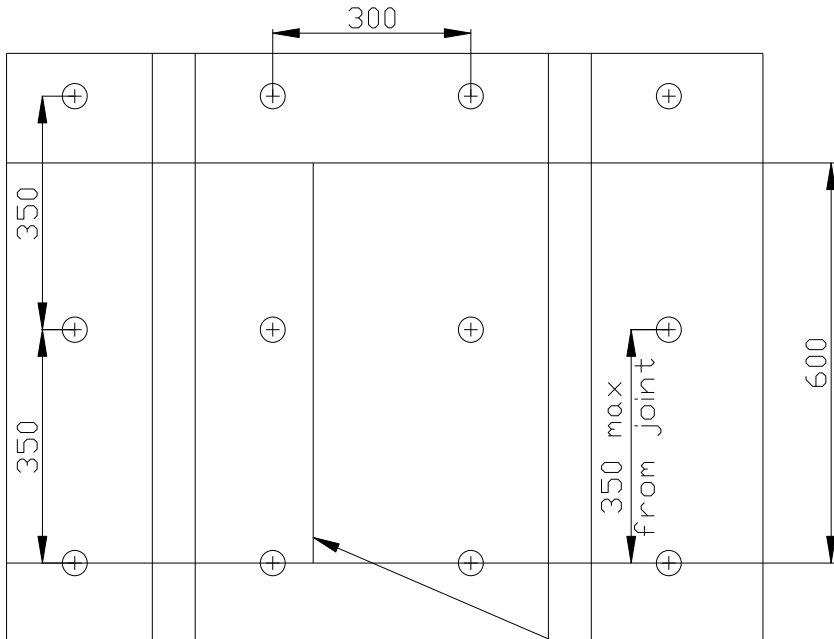

Note:

Blanket joint location may be placed at any point in between pins

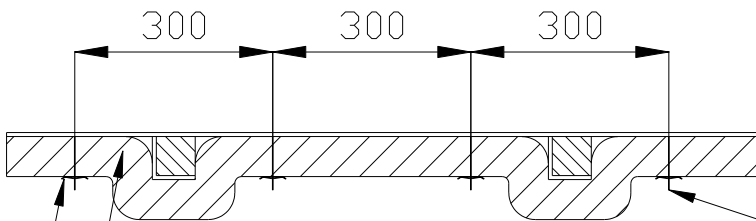

Blanket FyreWrap LT thk. 60mm $d=80\text{kg/m}^3$
610 mm wide compressed to 600 mm

$\varnothing 3\text{mm} \times 70\text{mm}$ long steel welded pins

Speed Clips

(washers to suit $\varnothing 3\text{mm}$)



This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

