

Drg. Nr: 152940

Doc. Rev: 1

July 2022



A60 STEEL BULKHEAD (Wide Pin Spacing)

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 50mm x 64 kg/m³ density installed vertically between stiffeners.

1 layer of FyreWrap LT Blanket 25mm x 64 kg/m³ density installed horizontally over the stiffeners.

INSTALLATION: The blanket is held by ø3mm x 90 mm long steel welded pins and speed clips.

WEIGHT: 4.8 kg/m²



CERTIFICATION: Lloyds Register - LR22137567MB
LR22137557SF

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP

Tel: +44 (0)1744 887600
www.unifrax.com



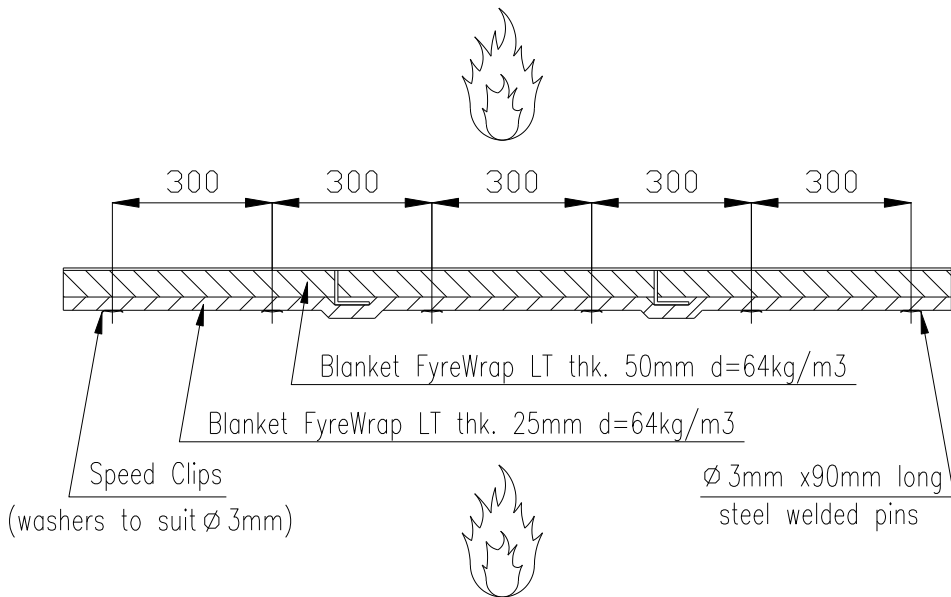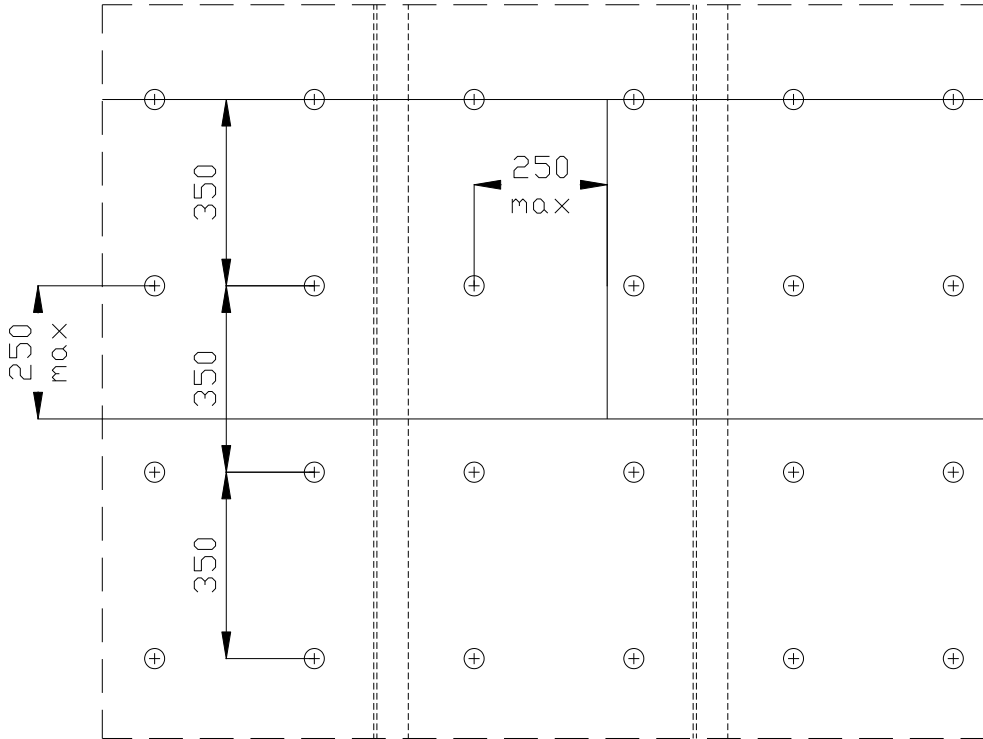

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

