

A60 STEEL BULKHEAD RESTRICTED APPLICATION

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 45mm x 64 kg/m³
density over deck plate.

1 layer of FyreWrap LT Blanket 45mm x 64 kg/m³
density vertically over the stiffeners in 200mm strips.

INSTALLATION: The blanket is held by ø3mm x 110 mm long steel
welded pins and speed clips.

The blanket will be installed vertically.

WEIGHT: 2.88kg/m²




CERTIFICATION: Lloyds Register - MED 1850134
- SAS F180175

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1344-R3-03 Rev. 2


October 2018

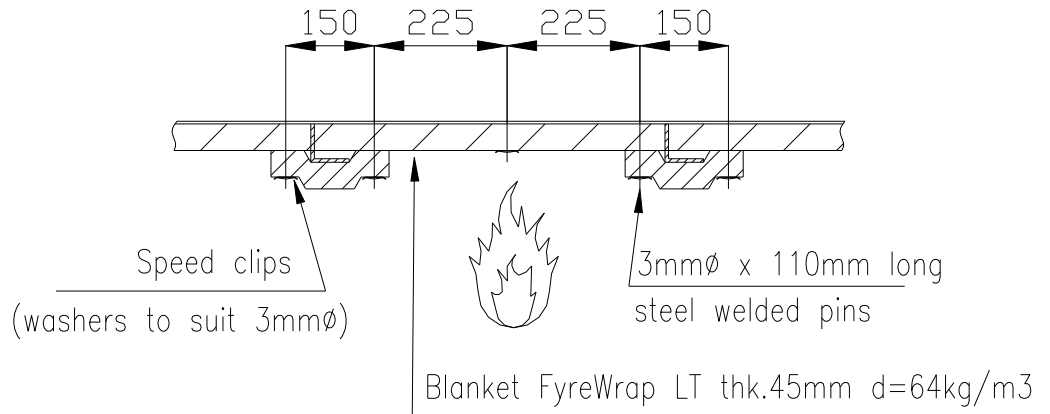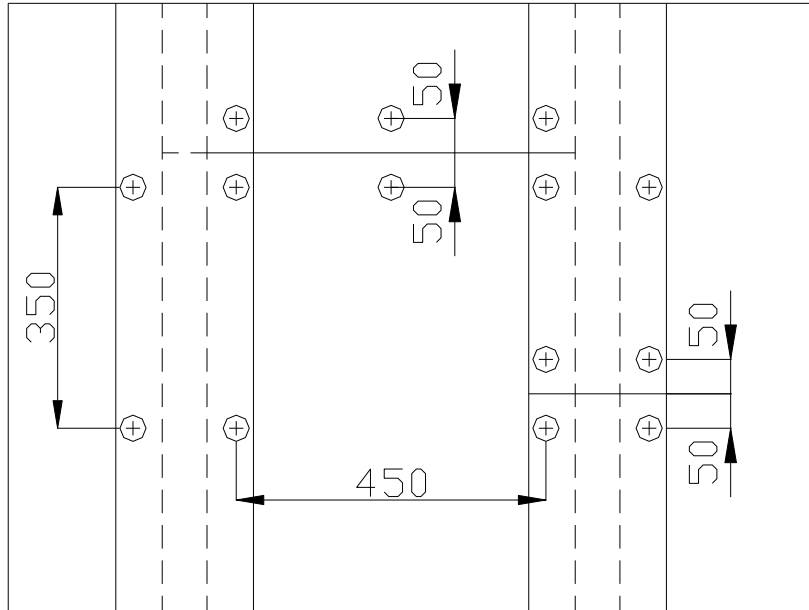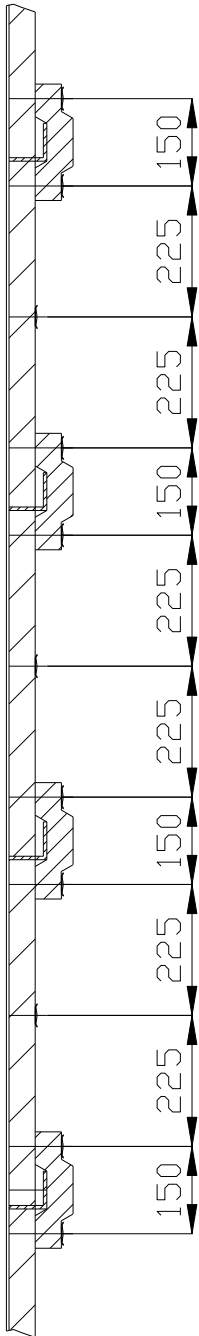

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**



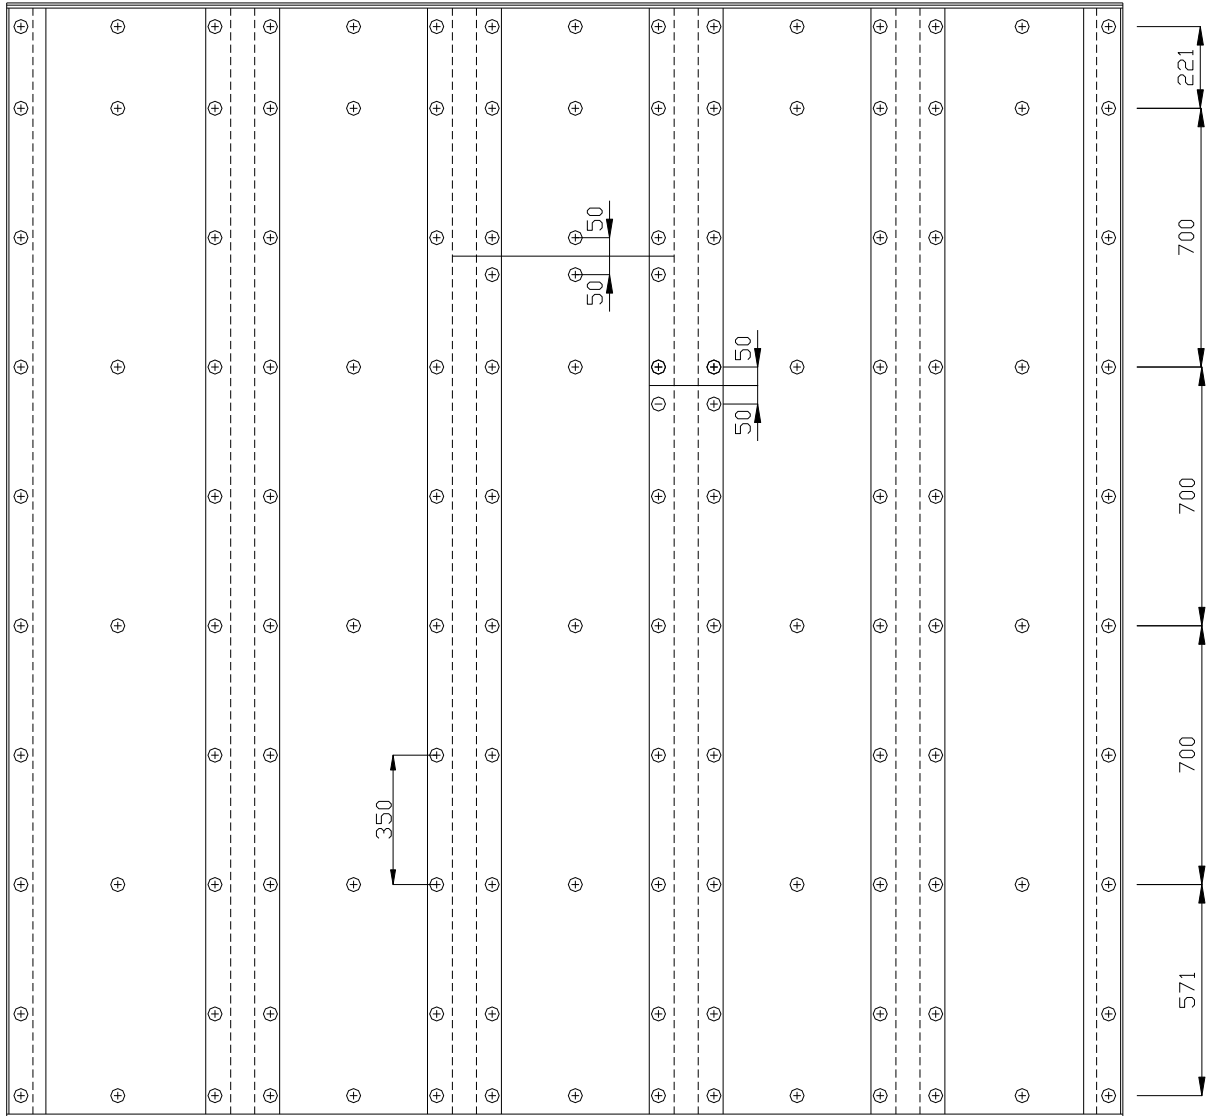

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

