

Drg. Nr: 152942

Doc. Rev: 2

July 2022



## A60 STEEL DECK (Wide Pin Spacing)

**MATERIAL:** FyreWrap LT Blanket

**INSULATION:** 1 layer of FyreWrap LT Blanket 45mm x 64 kg/m<sup>3</sup> density over deck plate and stiffeners.

**INSTALLATION:** The blanket is held by ø3mm steel welded pins and speed clips.


The blanket is wrapped around the stiffeners following the profile of the steel structure.

The blanket will be installed horizontally.

**WEIGHT:** 2.88kg/m<sup>2</sup>


**CERTIFICATION:** Lloyds Register - LR22172170MB  
- LR22171418SF

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

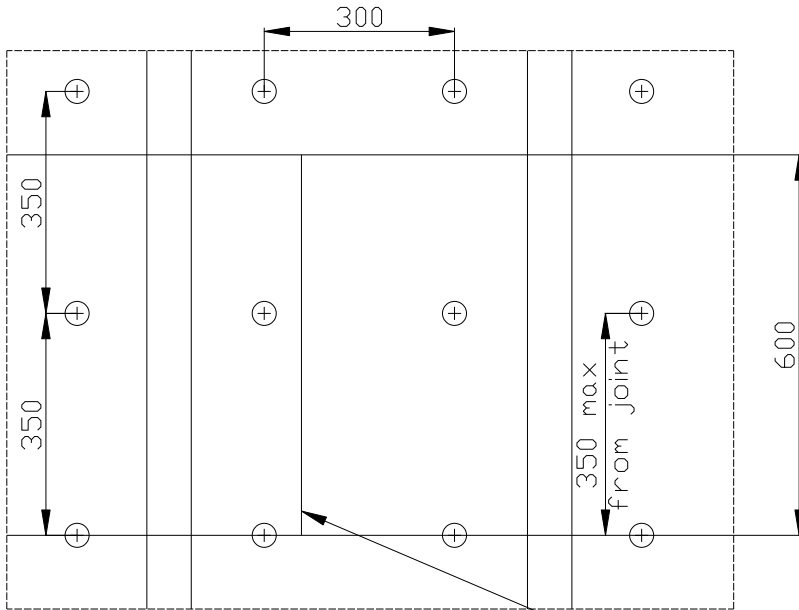

Note:

Blanket joint location may be placed at any point in between pins

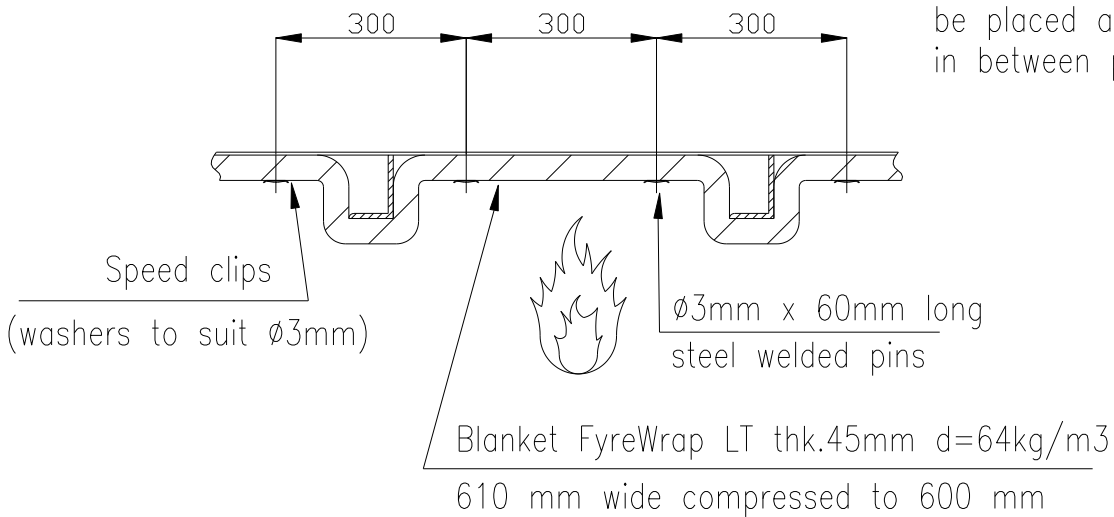

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

