

H0 STEEL DECK

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 40mm x 70 kg/m³ density over the deck plate and stiffeners.

INSTALLATION: The blanket is held by ø3mm steel welded pins and speed clips.

The blanket is wrapped around the stiffeners following the profile of the steel structure.

The blanket will be installed horizontally.

WEIGHT: 2.80kg/m²




CERTIFICATION: Lloyds Register - SAS F180181

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1374-R3-08 Rev. 3

October 2018

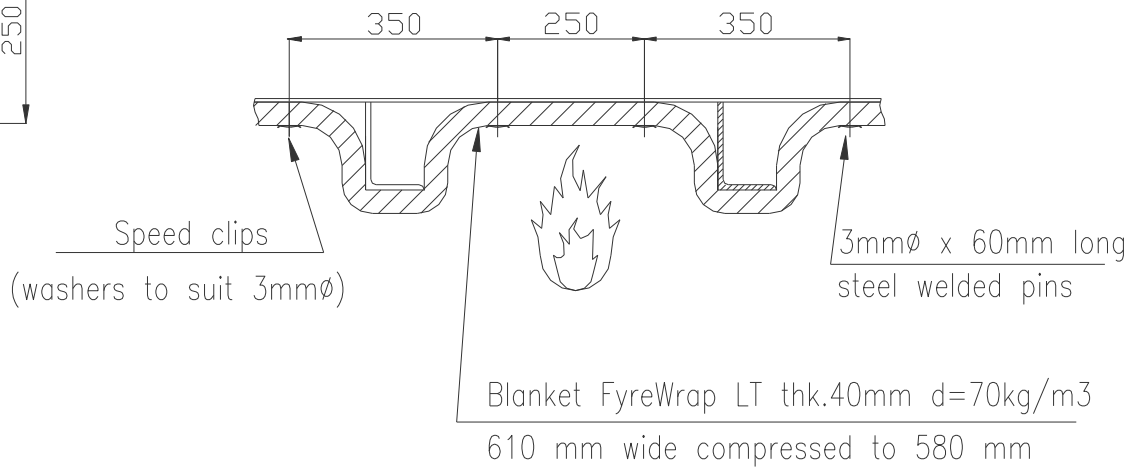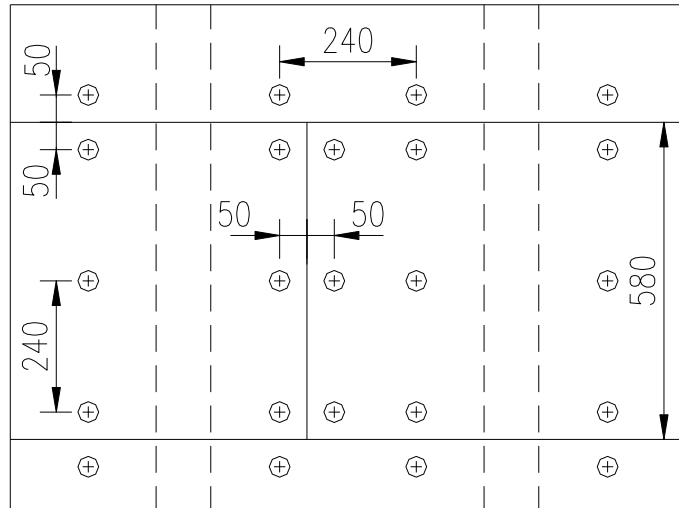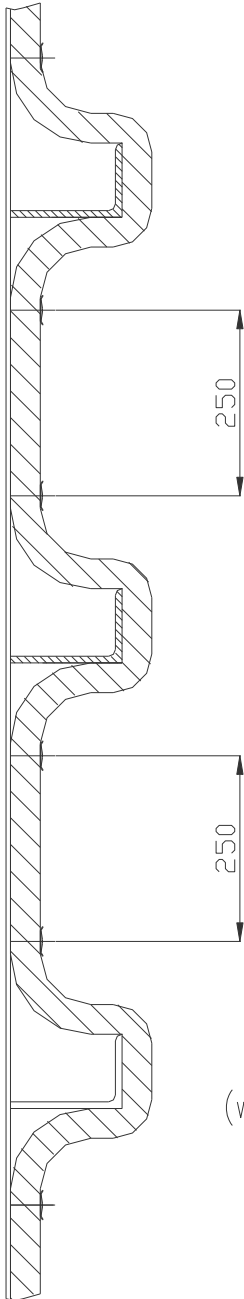

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

