



## H60 Steel Bulkhead

**MATERIAL:** FyreWrap LT Blanket

**INSULATION:** 3 layers of FyreWrap LT Blanket 40mm x 70 kg/m<sup>3</sup>

**INSTALLATION:** The blanket is held by ø3mm steel welded pins and speed clips.



Steel welded pins are typ. 150mm long.

The first layers installed vertical between the stiffeners.  
Second and third layers are installed horizontally following the profile of the steel structure.

**WEIGHT:** 8.4 kg/m<sup>2</sup>

**CERTIFICATION:** Lloyds Register - LR22135844SF

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

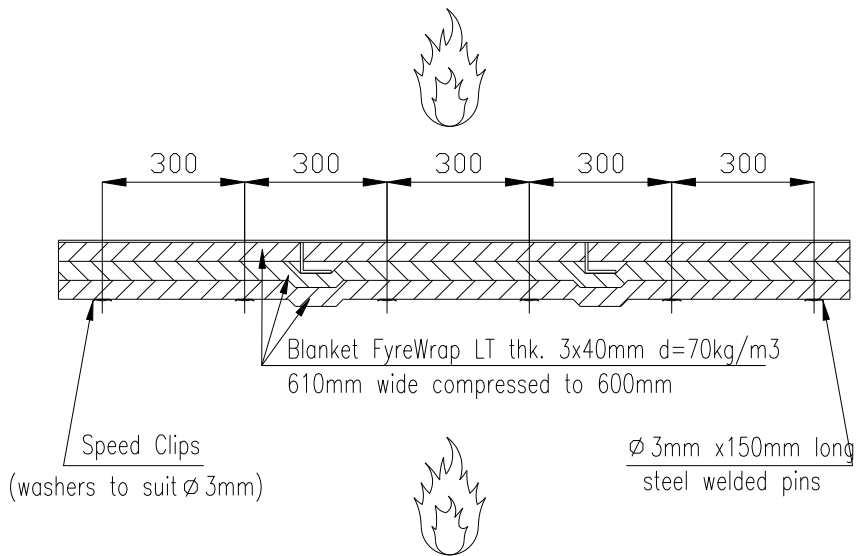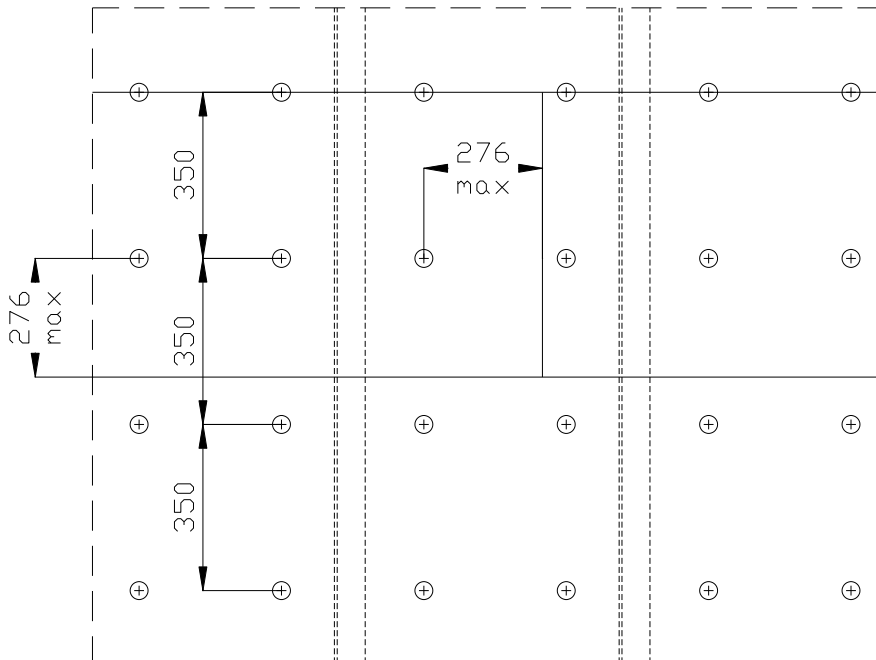

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

