



60 min HSC Bulkhead Restricted Application

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 50 mm x 70 kg/m³.

Strips of 50 mm x 70 kg/m³ blanket
installed vertically over the stiffeners.

INSTALLATION: The blanket is held by ø3mm steel pins and
speed clip washers.



Steel pins are secured in welded aluminium
ferrules. Pins are 65 mm long (115 mm long pins
used at strips).

The blanket is installed vertically between the
“T” shaped stiffeners.

WEIGHT: 3.50 kg/m²

CERTIFICATION: Lloyds Reg. - LR2004525MB
- SAS F180215

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

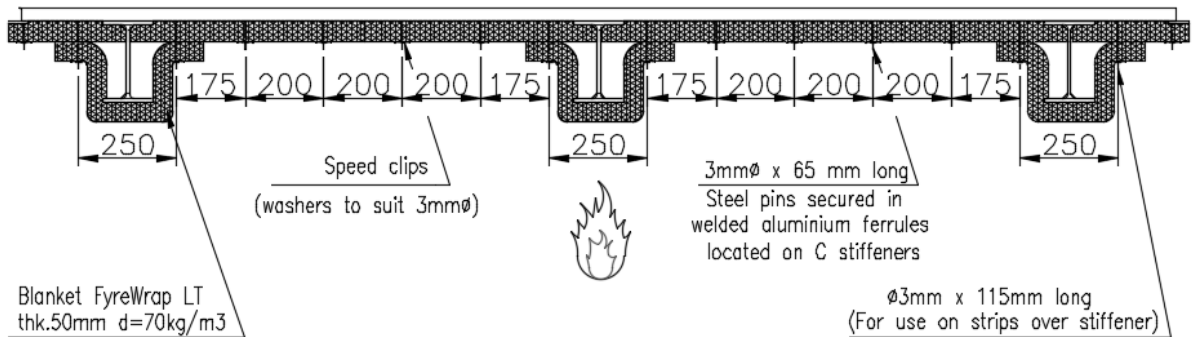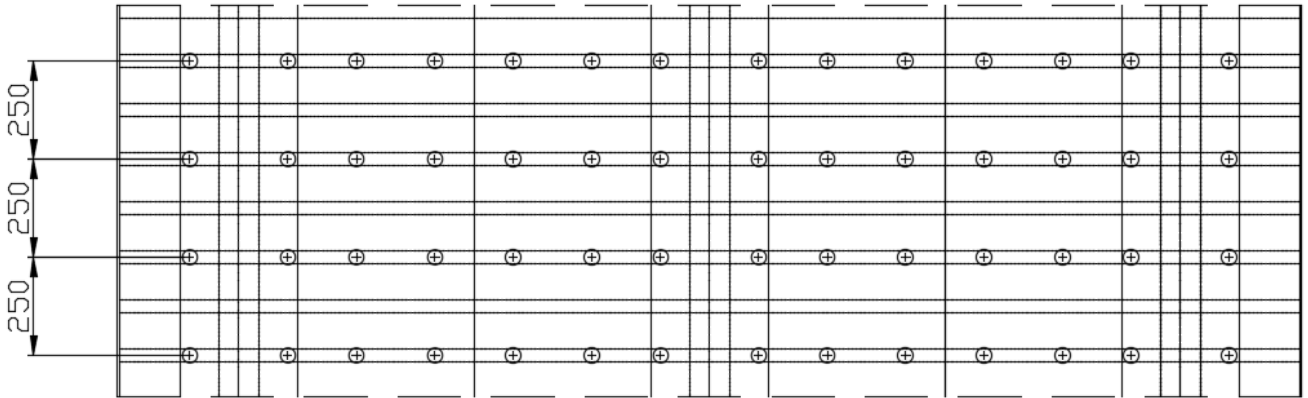

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

