

Drawing Ref:

FP-H3R2

July 2018

FyreWrap[®]

H60 STEEL BULKHEAD Restricted - Fire to Insulated Side

MATERIAL:	FyreWrap [®] Blanket Grade S, SF, SFR, SG or WR variants.
INSULATION:	1 layer of 50mm of 144 kg/m ³ FyreWrap Blanket
INSTALLATION:	The blanket is held by Ø3mm steel welded pins and spring washers. The blankets are wrapped around the stiffeners following the profile of the steel structure.
WEIGHT:	7.20 kg/m ²
CERTIFICATION:	LR – SAS F180115

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP

Tel: +44 (0)1744 887600
www.unifrax.com





Drawing Ref:

FP-H3R2

July 2018

FyreWrap[®]

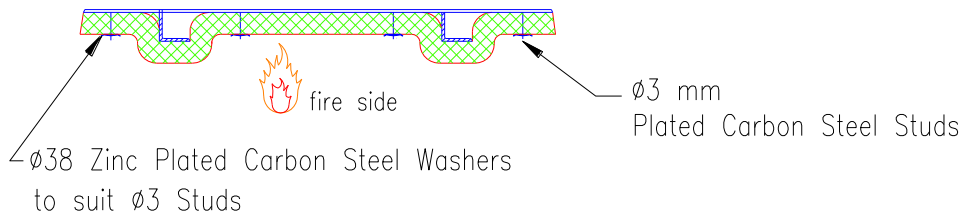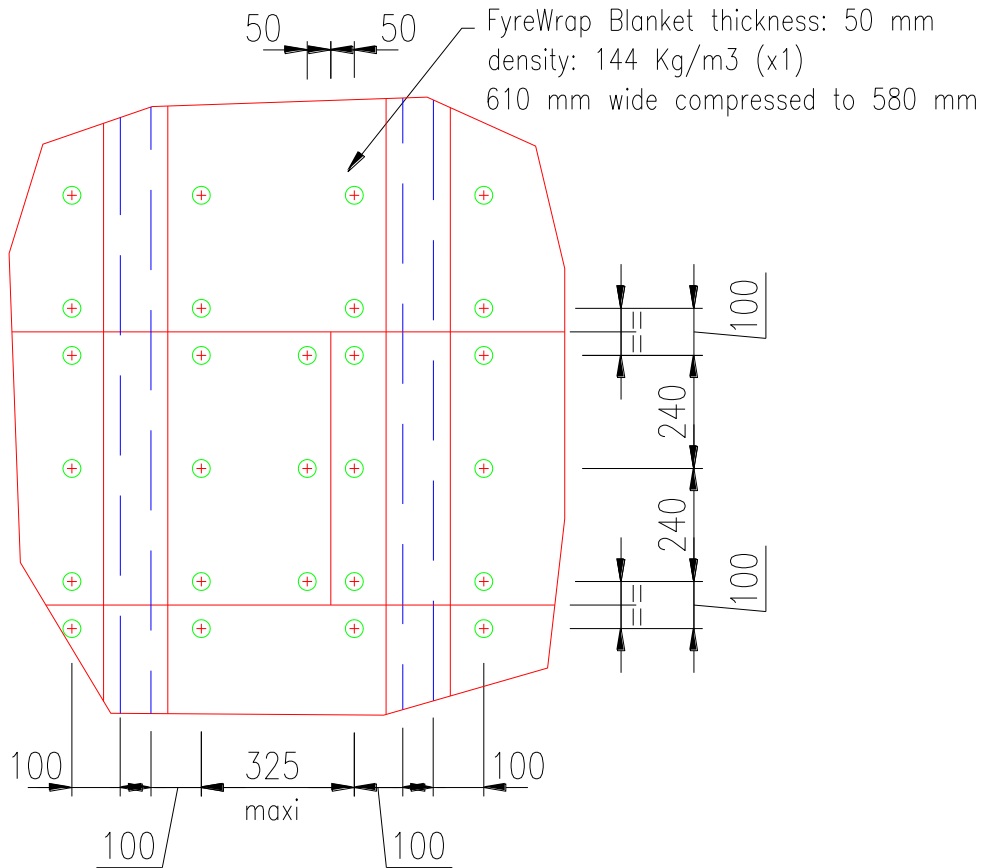

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

UNIFRAX