

H0 STEEL BULKHEAD

Restricted Application

MATERIAL: FyreWrap LT Blanket

INSULATION: 1 layer of FyreWrap LT Blanket 40mm x 70 kg/m³ density over deck plate.

1 layer of FyreWrap LT Blanket 40mm x 70 kg/m³ density over the stiffeners in 210mm wide strip.

INSTALLATION: The blanket is held by ø3mm x 90 mm long (65 mm between stiffeners) steel welded pins and speed clips. The blanket will be installed vertically.

WEIGHT: 2.80kg/m²




CERTIFICATION: Lloyds Register - SAS F180179

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1373-R3-08 Rev. 2

October 2018

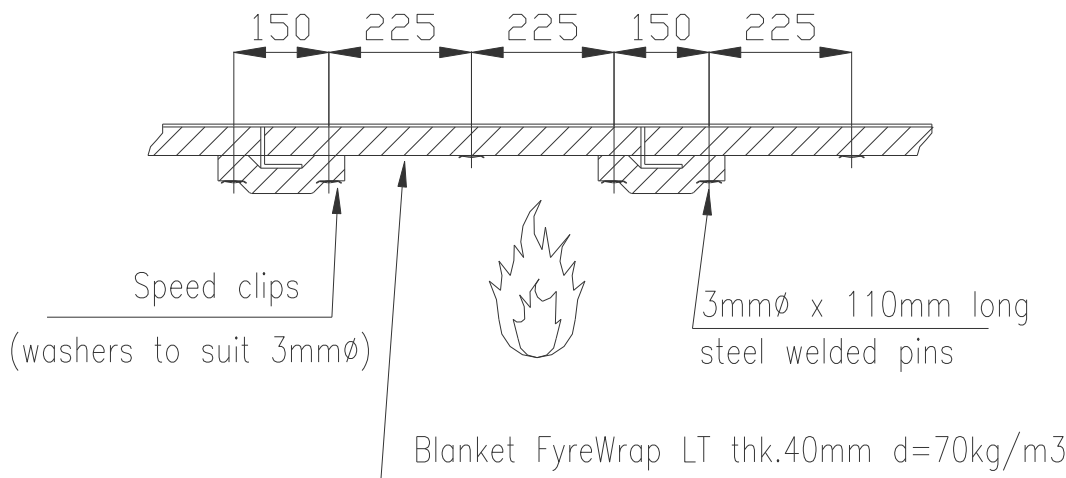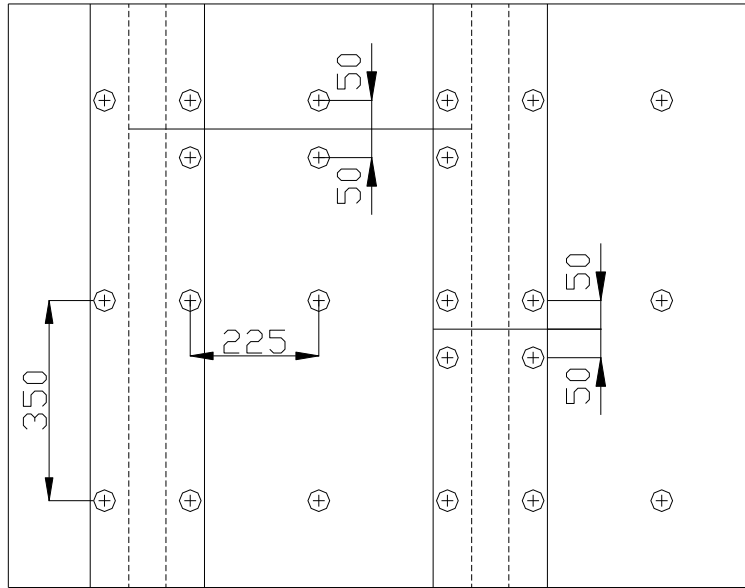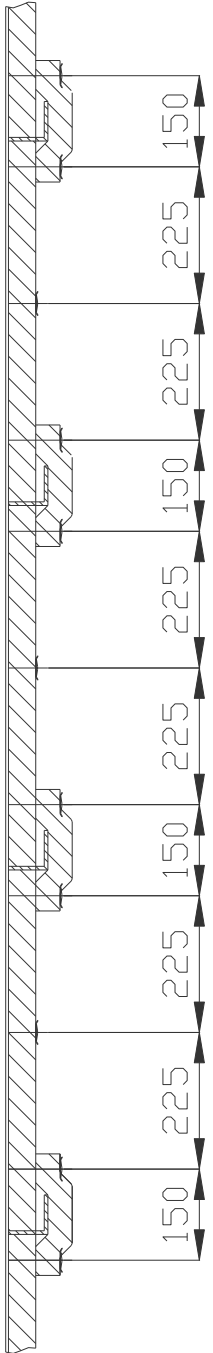

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

