

H60 Steel Bulkhead

MATERIAL: FyreWrap LT Blanket

INSULATION: 3 layers of FyreWrap LT Blanket 40mm x 70 kg/m³

INSTALLATION: The blanket is held by ø3mm steel welded pins and speed clips.

Steel welded pins are typ. 150 mm long.

The first layer is installed vertical between the stiffeners.

Second and third layers are installed horizontally following the profile of the steel structure.

WEIGHT: 8.40kg/m²

CERTIFICATION: Lloyds Register - SAS F130254

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:


1317-R3-02 Rev. 2

September 2013




Typical joint in first layer –
half way between pins

Typical joint in second layer –
half way between pins

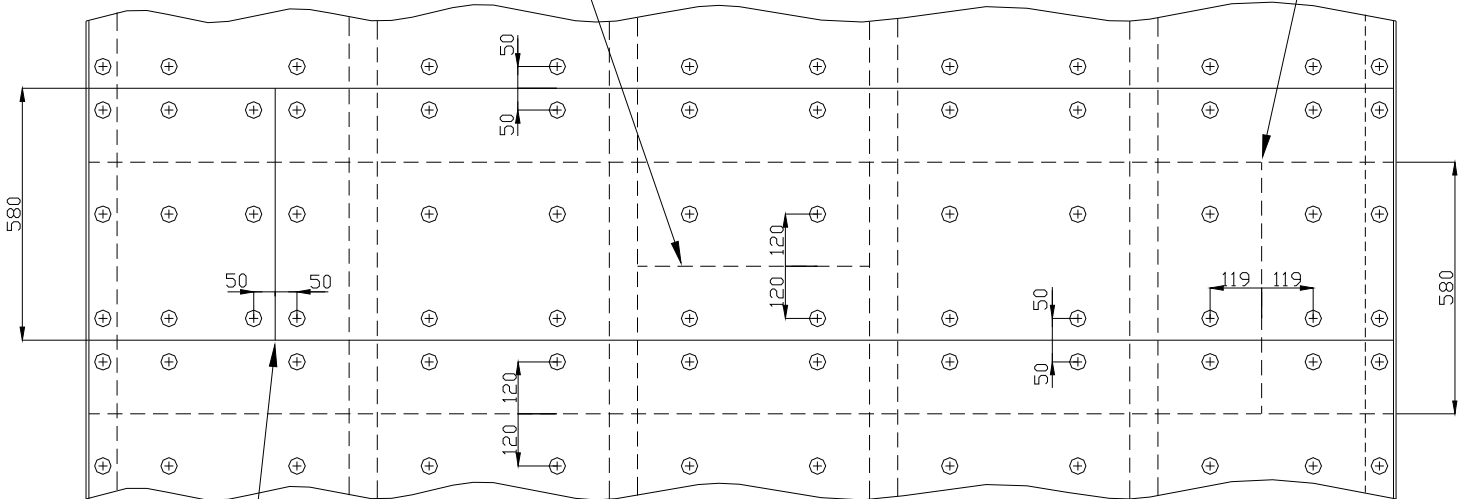

Typical joint in outer layer –
half way between pins

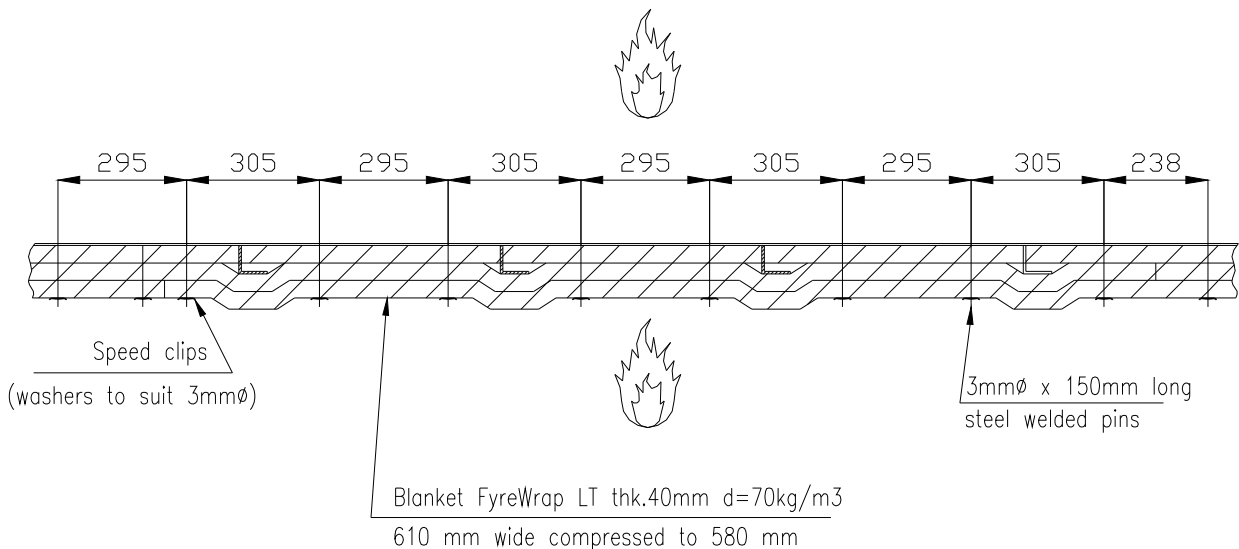

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

