

H60 Steel Deck




MATERIAL:	FyreWrap [®] LT Blanket
INSULATION:	2 layers of FyreWrap LT Blanket 35mm x 70 kg/m ³ density over the deck plate and stiffeners.
INSTALLATION:	<p>The blanket is held by ø3mm steel welded pins and speed clips.</p> <p>The blanket is wrapped around the stiffeners following the profile of the steel structure.</p> <p>The blanket will be installed horizontally.</p>
WEIGHT:	4.90kg/m ²
CERTIFICATION:	Lloyds Register - SAS F180146

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1307-R3-01 Rev. 5

July 2018

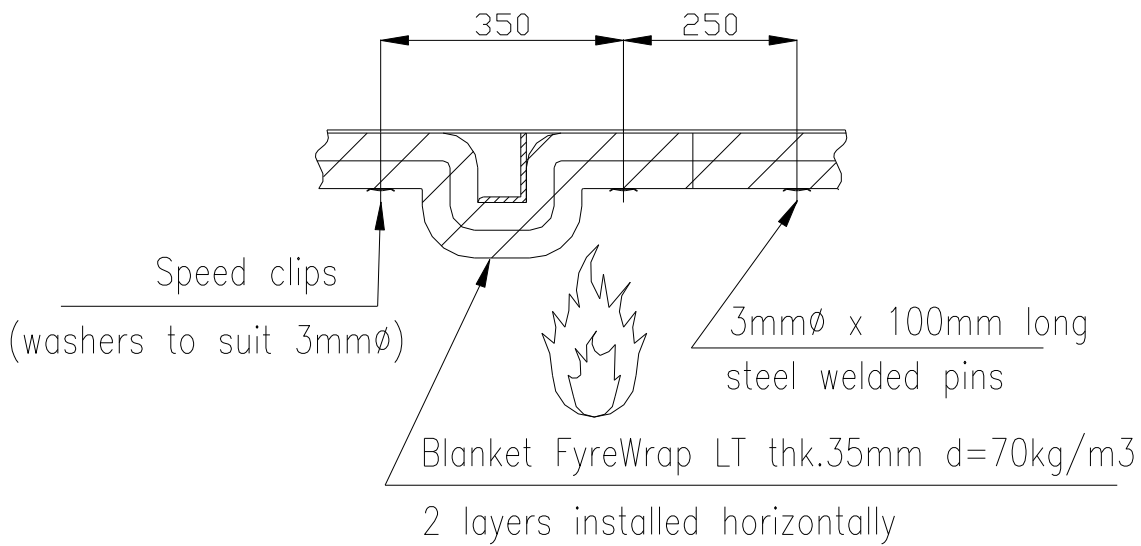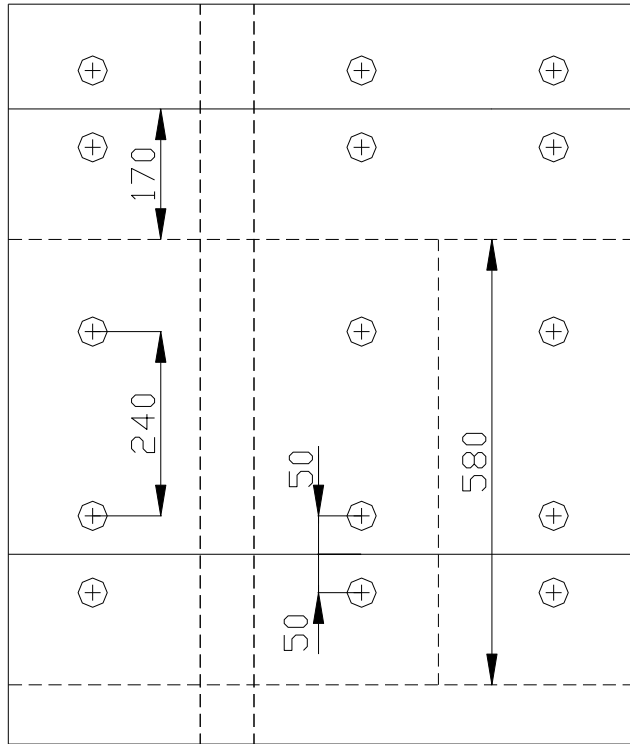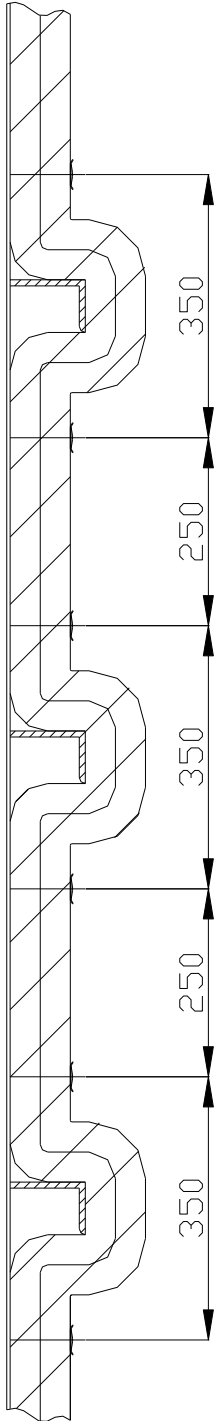

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**




Drawing Ref:

1307-R3-01 Rev. 5

July 2018



JOINT IN SECOND LAYER
(FURNACE EXPOSED FACE)

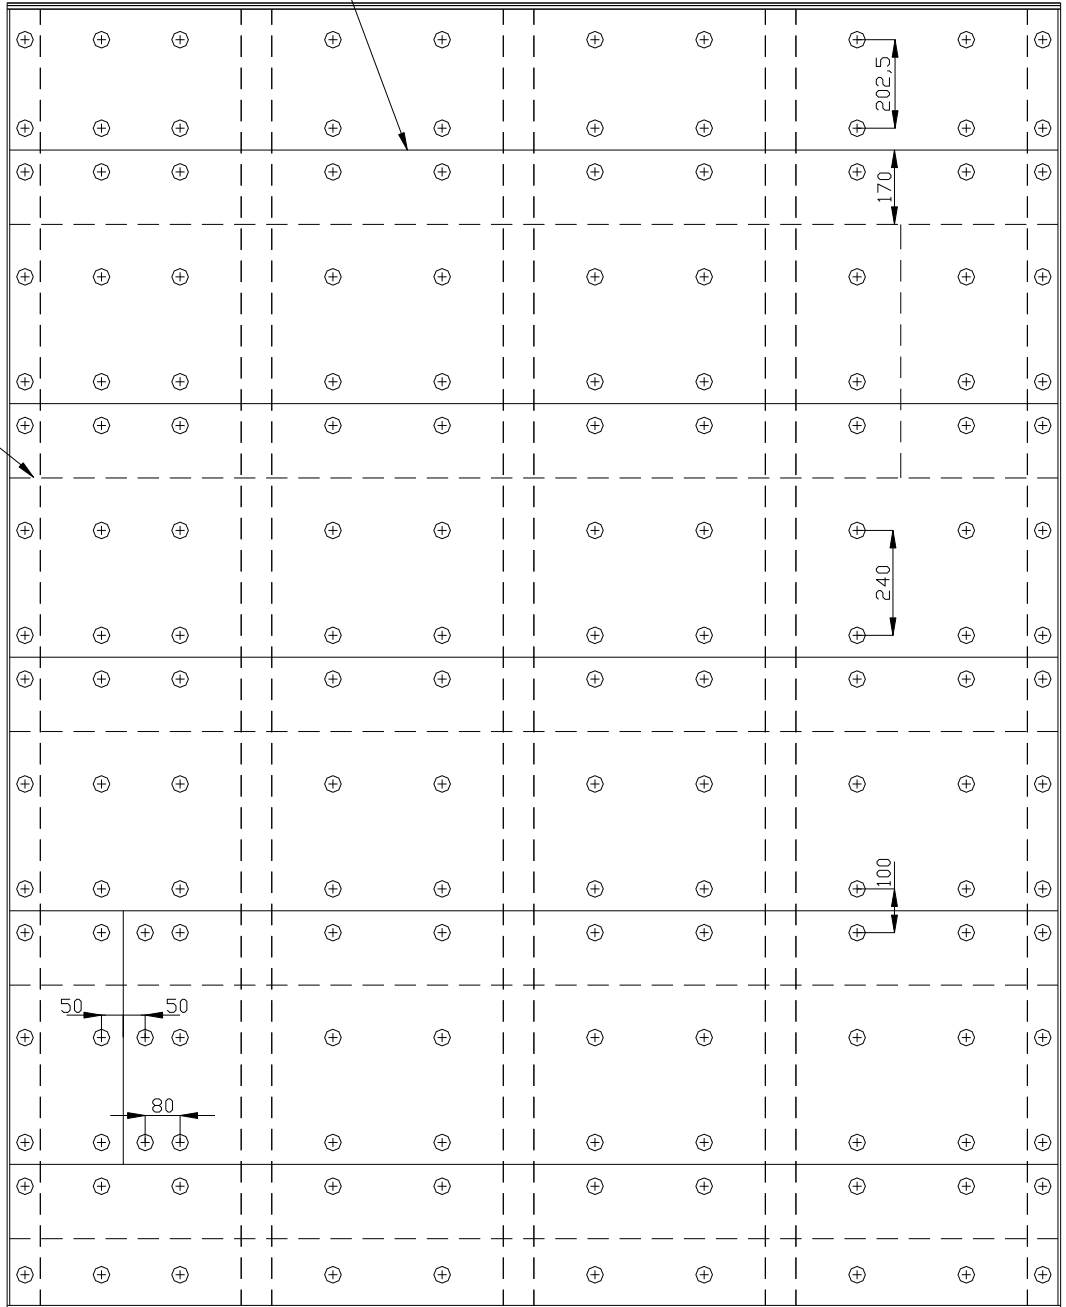

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

