


## A60 STEEL BULKHEAD

- MATERIAL:** FyreWrap® Blanket  
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of 25mm of 128 kg/m<sup>3</sup> FyreWrap® Blanket between the stiffeners and 1 second layer of 38mm of 128 kg/m<sup>3</sup> FyreWrap® Blanket wrapped around the stiffeners following the profile of the steel structure.
- INSTALLATION:** The blanket is held by Ø3mm x75mm long steel welded pins and speed clips washers.
- WEIGHT:** 8.06 kg/m<sup>2</sup>
- CERTIFICATION:** DNV.GL TAF00001F7  
DNV.GL MEDB000012A

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

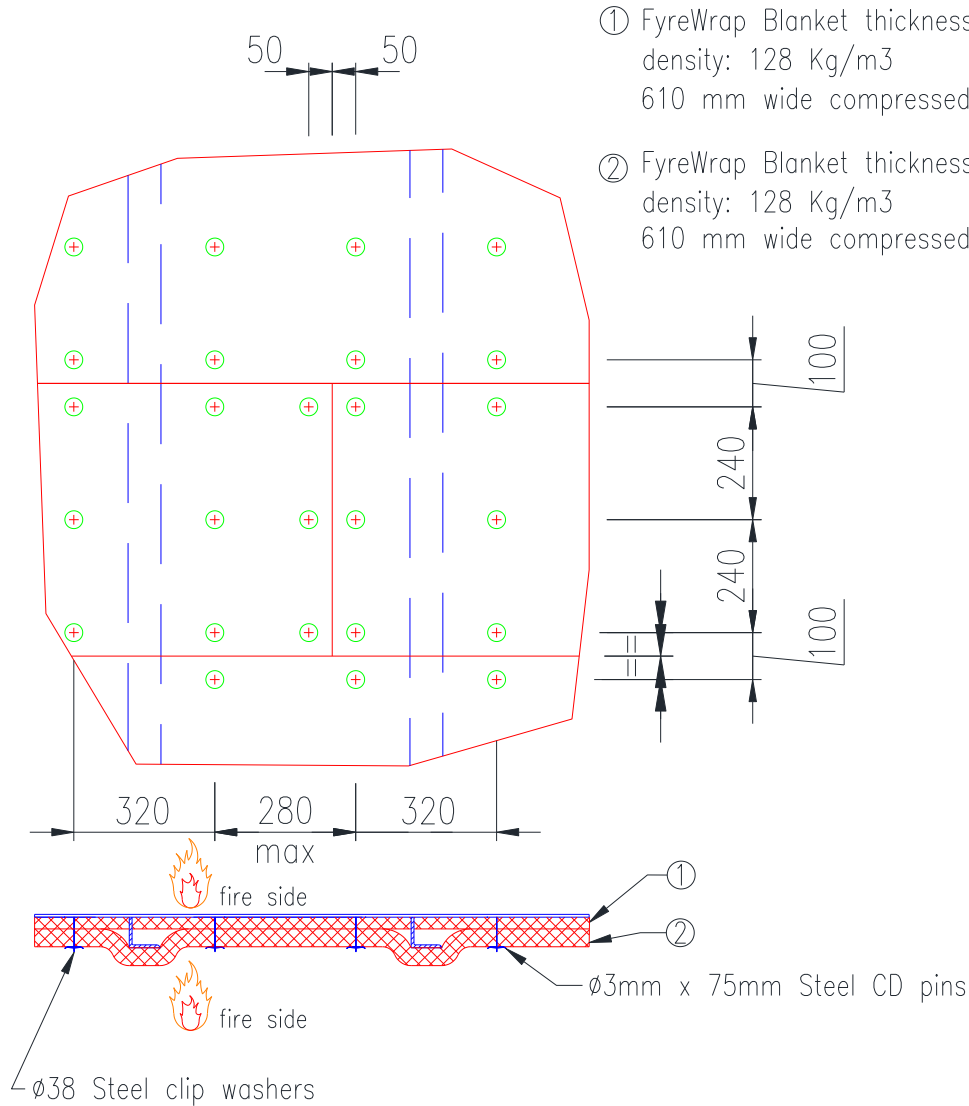

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

