

## H120 Steel Deck




- MATERIAL:** FyreWrap<sup>®</sup> LT Blanket
- INSULATION:** 2 layers of FyreWrap LT Blanket 40mm x 70 kg/m<sup>3</sup> density over bulkhead plate and stiffeners.
- INSTALLATION:** The blanket is held by ø3mm steel welded pins and speed clips.
- The blanket is wrapped around the stiffeners following the profile of the steel structure.
- The blanket will be installed horizontally.
- WEIGHT:** 5.60kg/m<sup>2</sup>
- CERTIFICATION:** Lloyds Register - SAS F180147

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1314-R3-02 Rev. 3

July 2018

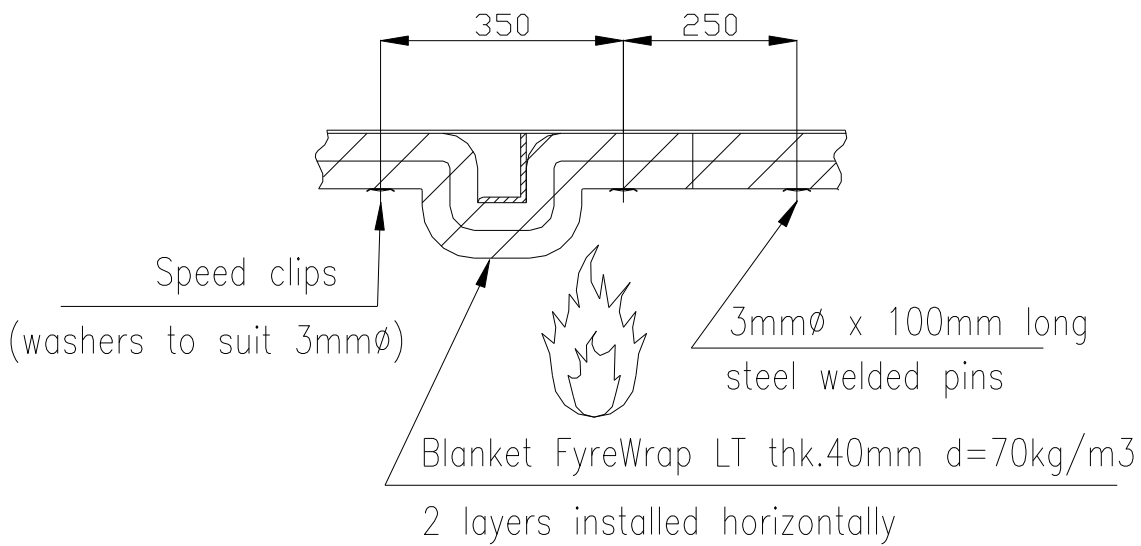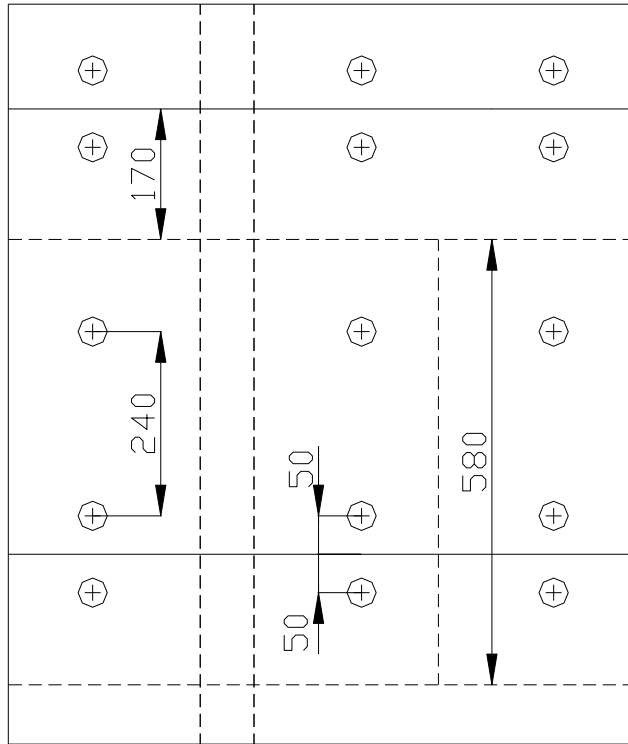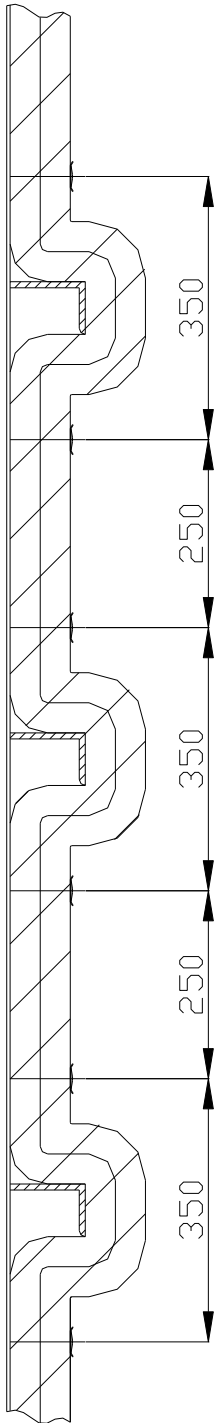

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**




Drawing Ref:

1314-R3-02 Rev. 3

July 2018



JOINT IN SECOND LAYER  
(FURNACE EXPOSED FACE)

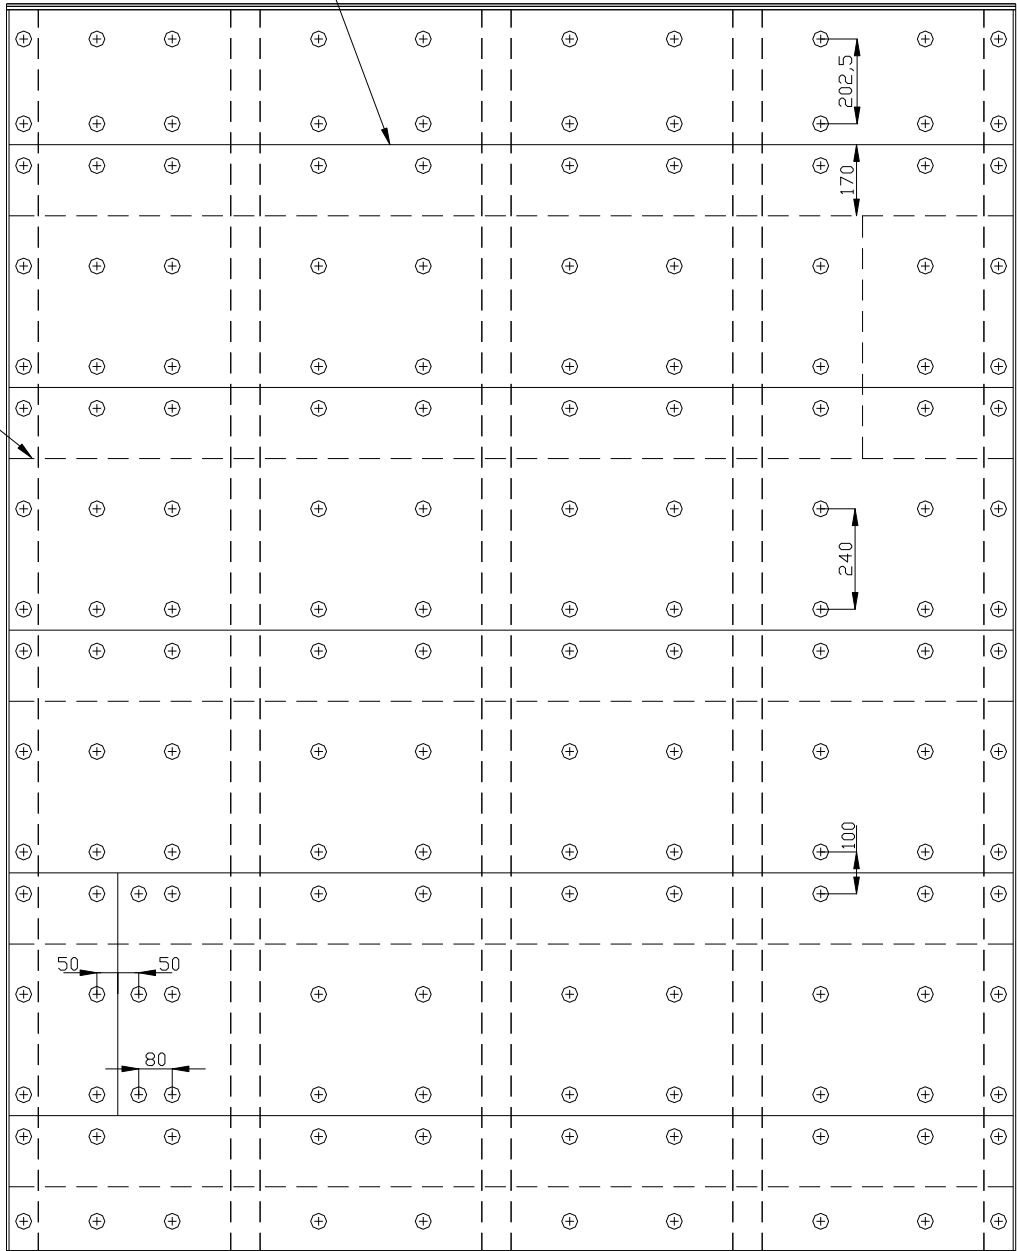

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

