


Drawing Ref:

FP-A1.6R2

October 2016



0062

FyreWrap[®]
Fire protection materials

A60 STEEL DECK

- MATERIAL:** FyreWrap® Blanket
Grade S, SF, SFR, SG or WR variants.
- INSULATION:** 1 layer of 38mm of 96 kg/m³ FyreWrap® Blanket wrapped around the stiffeners following the profile of the steel structure.
- INSTALLATION:** The blanket is held by Ø3mm x 50mm long steel welded pins and speed clip washers
- WEIGHT:** 3.65 kg/m²
- CERTIFICATION:** DNV.GL TAF00000BF
DNV.GL MEDB000009U

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Unifrax Limited
Mill Lane, Rainford, St. Helens
Merseyside
England
WA11 8LP


Tel: +44 (0)1744 887600
Fax: +44 (0)1744 6443
www.unifrax.com

UNIFRAX

Drawing Ref:


FP-A1.6R2

October 2016



0062

FyreWrap
Fire protection materials

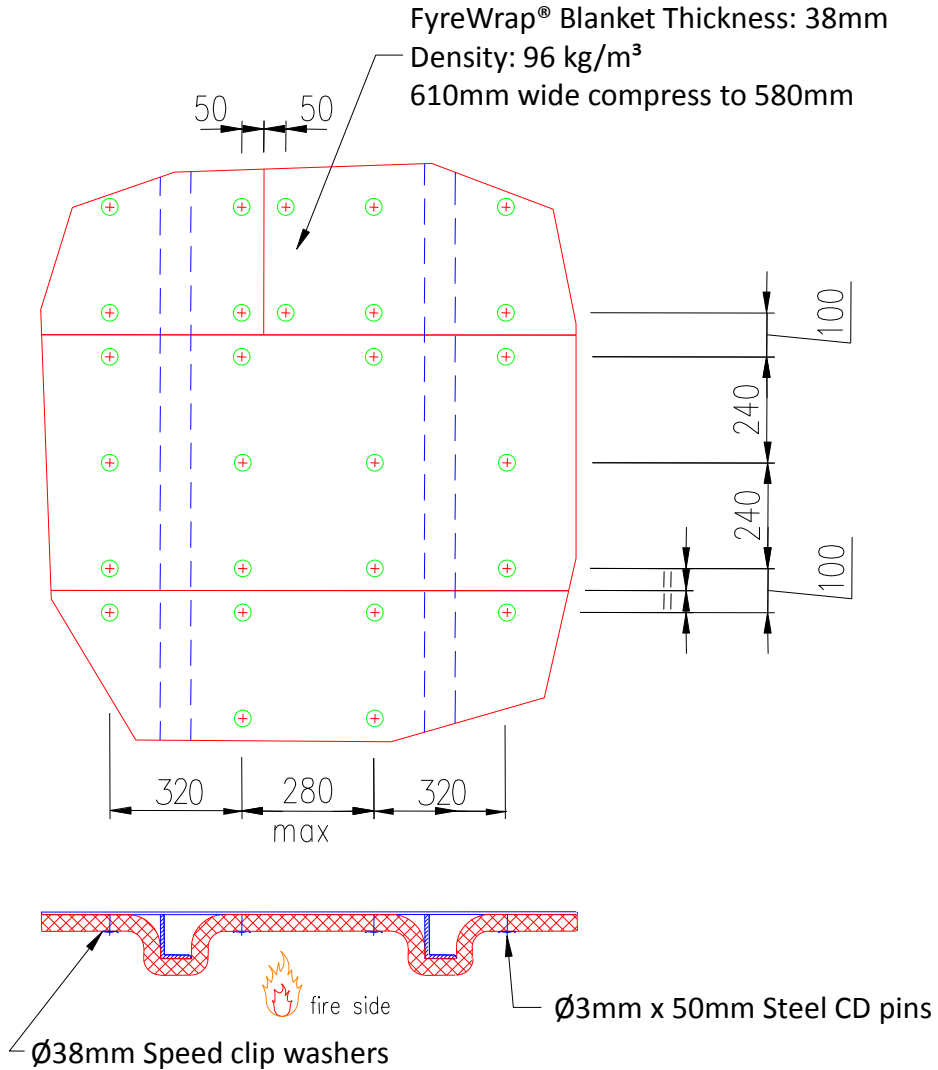

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH
INTEGRITY AND TRUST**

UNIFRAX