

## A30 STEEL DECK




<b>MATERIAL:</b>	FyreWrap LT Blanket
<b>INSULATION:</b>	1 layer of FyreWrap LT Blanket 25mm x 64 kg/m <sup>3</sup> density over deck plate and stiffeners.
<b>INSTALLATION:</b>	<p>The blanket is held by ø3mm steel welded pins and speed clips.</p> <p>The blanket is wrapped around the stiffeners following the profile of the aluminum structure.</p> <p>The blanket will be installed horizontally.</p>
<b>WEIGHT:</b>	1.60kg/m <sup>2</sup>
<b>CERTIFICATION:</b>	Lloyds Register - MED 1850104 - SAS F180139

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

Drawing Ref:

1301-R3-01 Rev. 2

June 2018

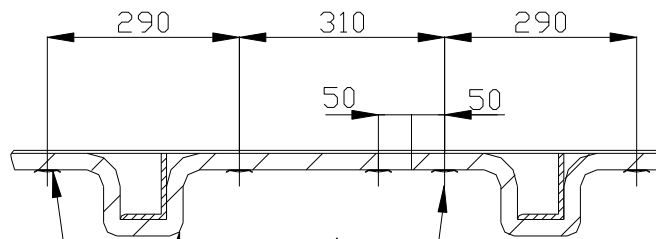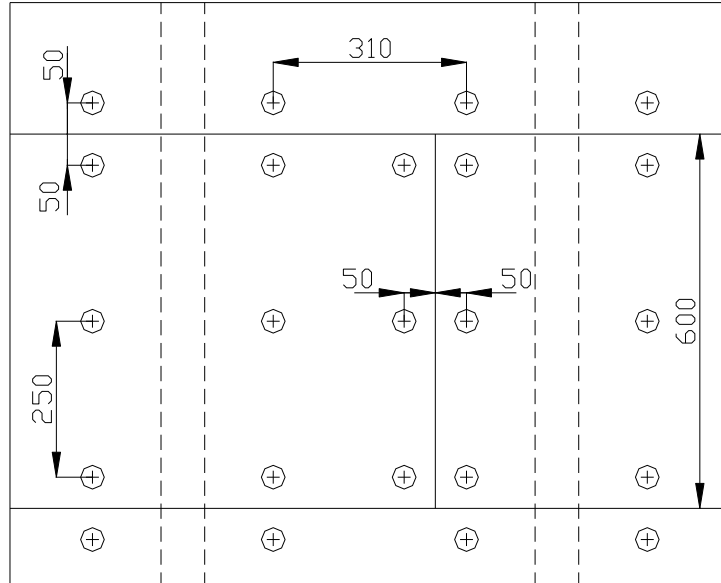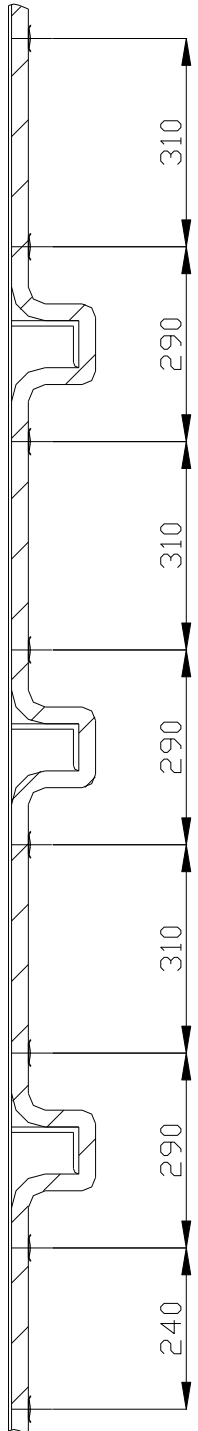

Speed clips  
(washers to suit 3mm $\varnothing$ )



3mm $\varnothing$  x 50mm long  
steel welded pins

Blanket FyreWrap LT thk.25mm d=64kg/m<sup>3</sup>  
610 mm wide compressed to 600 mm

This is a legal document and Unifrax own the copyright. Under no circumstances should this document be changed in any way without prior agreement from Unifrax.

**FIRE PROTECTION WITH  
INTEGRITY AND TRUST**

